

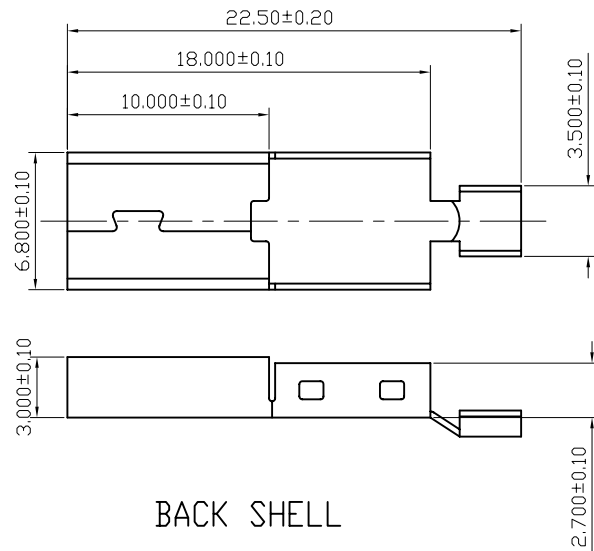




FRONT SHELL



BACK SHELL



VIEW A 5:1

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold rolled steel,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 m Ω Max.
- 2.4 Insulation resistance: 1000 m Ω Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C.

3.Finishes:

- 3.1 Contacts: Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated.

MSB-PS-5B-LF
LEADFREE

RoHS Compliant

4	FRONT SHELL	1	Cold rolled steel	T=0.30±0.02mm	Nickel plated	E068AXX-H
3	BACK SHELL	1	Cold rolled steel	T=0.30±0.02mm	Nickel plated	E068AXX-C
2	CONTACT	5	Brass	T=0.25±0.02mm	Gold flashed	JCH0006
1	HOUSING	1	PBT		Black	
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MSB-PS-5B

DWG NO. MSB-PS-5B

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

MINI U.S.B 5P MALE SOLDER(5出4)

AREA

REVISIONS

HK

DATE

焜倫股份有限公司