
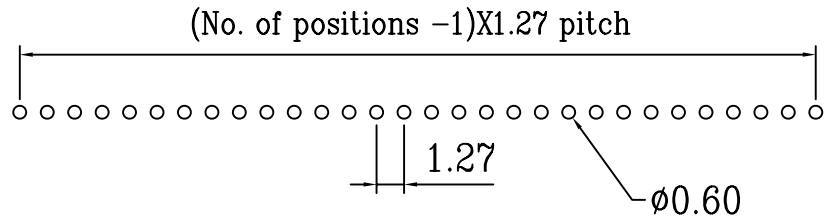


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

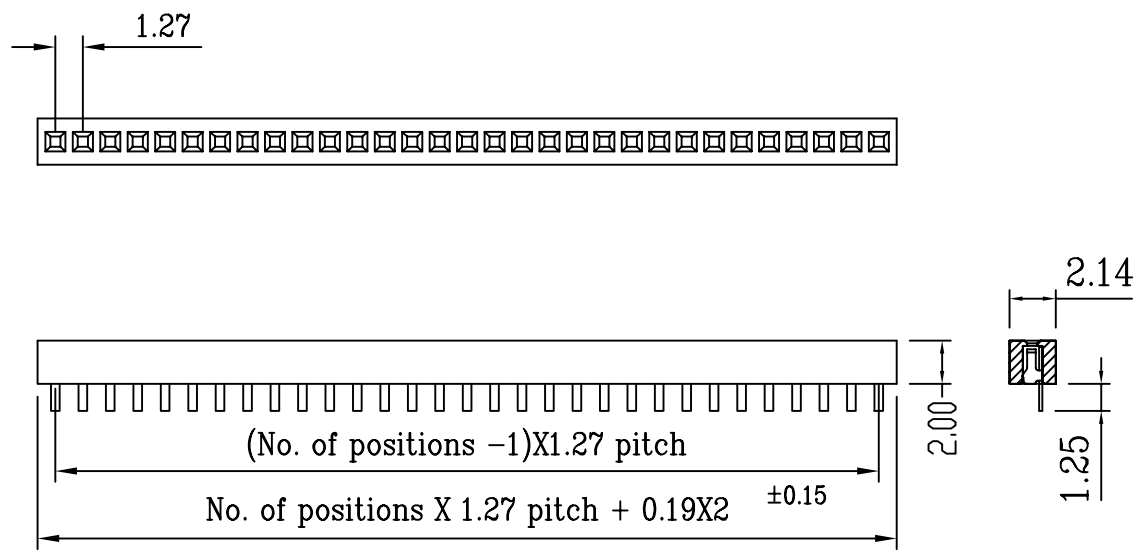

YA-D20-1Xxx-LF
LEADFREE

RoHS Compliant

Recommended P.C.B. Layout



PART NO. YA-D20-1Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 1.27X1.27mm SOCKET LOW PROFILE 2.0mm DIP TYPE
DWG NO. YA-D20-1Xxx				
FILE NO.		DRAWING BY	AREA	REVISIONS
UNIT / mm	SCALE 1:1	PROJECTION		

煜倫股份有限公司