

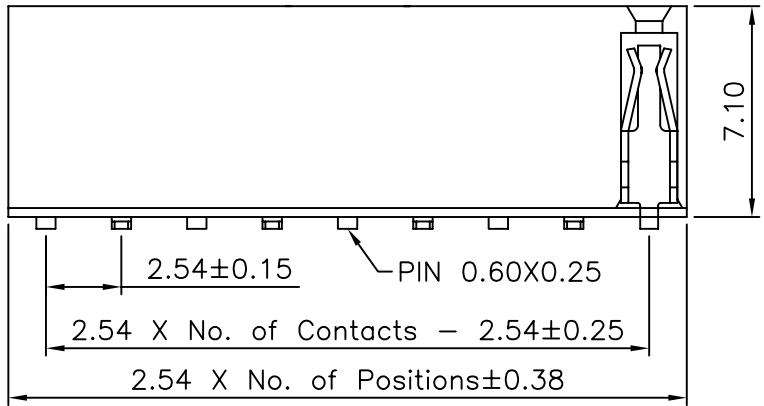


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

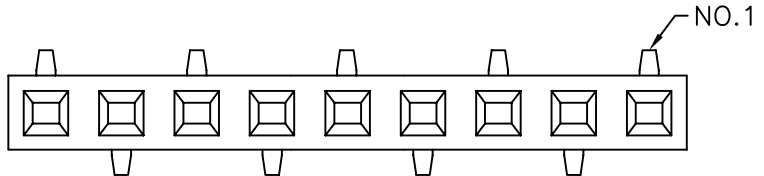

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

F-Z75X-1XxxL-LF
 LEADFREE

RoHS Compliant

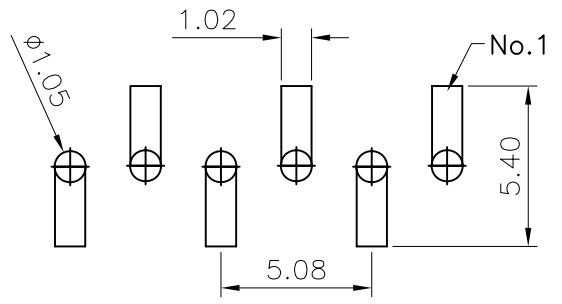

RECOMMENDED P.C.B LAYOUT FOR BOTTOM ENTRY



PART NO. F-Z75X-1XxxL

DWG NO. F-Z75X-1XxxL

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE BASE 7.10H

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE