

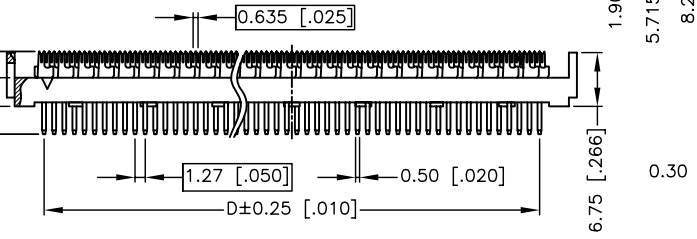



RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

HIP40-C2S-xxx-LF
LEADFREE
020:20PIN
100:100PIN
RoHS Compliant

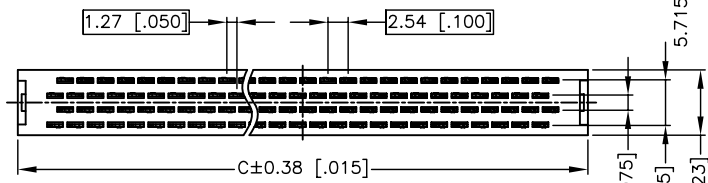

MATERIALS

1. HOUSING : NYLON 66 (UL94V-0).
2. TERMINAL : COPPER ALLOY
TIN PLATED OVER NICKEL. (t=0.30mm)

SPECIFICATION

1. CURRENT RATING : 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
300V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN.
AT 500V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.

HIP40-C2S-020	BLACK	18.80 [0.740]	20.80 [0.819]	20.80 [0.819]	11.43 [0.450]
HIP40-C2S-040	BLACK	31.42 [1.237]	33.50 [1.319]	33.50 [1.319]	24.13 [0.950]
HIP40-C2S-060	BLACK	44.20 [1.740]	46.20 [1.820]	46.20 [1.820]	36.83 [1.450]
HIP40-C2S-068	BLACK	49.20 [1.937]	51.40 [2.024]	51.18 [2.015]	41.91 [1.650]
HIP40-C2S-080	BLACK	56.82 [2.237]	59.00 [2.323]	58.90 [2.319]	49.53 [1.950]
HIP40-C2S-100	BLACK	69.60 [2.740]	71.60 [2.620]	71.60 [2.620]	62.23 [2.450]
P/N	COLOR	A	B	C	D

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. HIP40-C2S-xxx

DWG NO. HIP40-C2S-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION:	DIP PLUG IDC 0.635 (4R) KIT ROHS			
	AREA	REVISIONS	HK	DATE