


Features:

- * Available in 2 through 16 circuits
- * Material: Insulator: Nylon 66 UL 94V-0

Specifications:

Rated Voltage	125V AC,DC
Rated Current	2A (AWG #24)
Withstand Voltage	1000V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+95°C
Applicable P.C.B. Thickness	0.8~1.6mm
Applicable P.C.B. Hole dia.	∅0.80±0.05mm

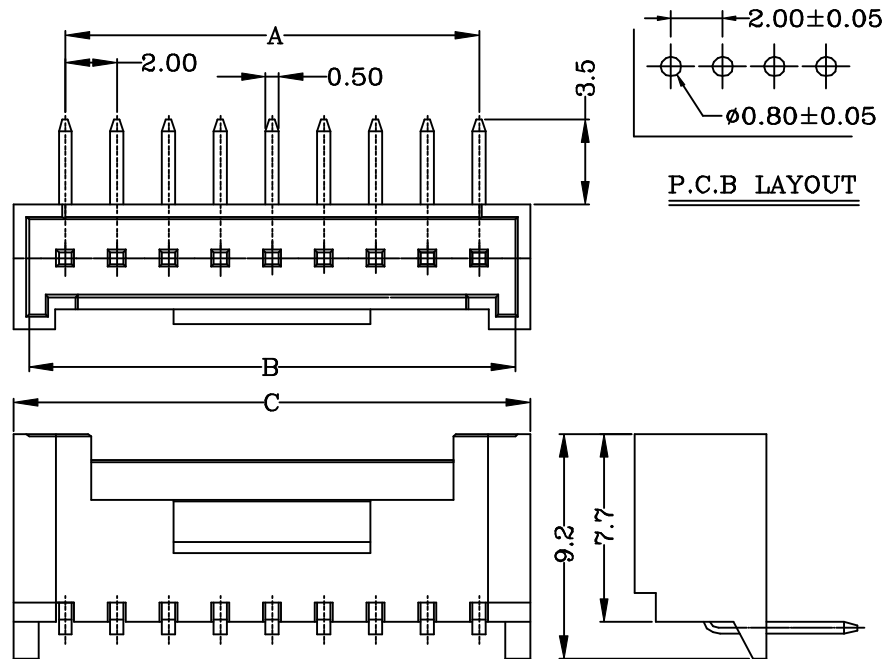

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			PCS/BAG
		A	B	C	
2	YH20-R-02	2.00	4.75	5.98	1000
3	YH20-R-03	4.00	6.75	7.98	
4	YH20-R-04	6.00	8.75	9.98	
5	YH20-R-05	8.00	10.75	11.98	
6	YH20-R-06	10.00	12.75	13.98	
7	YH20-R-07	12.00	14.75	15.98	
8	YH20-R-08	14.00	16.75	17.98	
9	YH20-R-09	16.00	18.75	19.98	
10	YH20-R-10	18.00	20.75	21.98	
11	YH20-R-11	20.00	22.75	23.98	
12	YH20-R-12	22.00	24.75	25.98	
13	YH20-R-13	24.00	26.75	27.98	
14	YH20-R-14	26.00	28.75	29.98	
15	YH20-R-15	28.00	30.75	31.98	
16	YH20-R-16	30.00	32.75	33.98	

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫有限公司

PART NO. YH20-R-xx

DWG NO. YH20-R-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE