

Technical Data:

Material:

- Contact(metal housing): Brass Machined
- Terminal screw: Steel galvanized and chromate or Nickel plated or Tin plated (standard) (option)

- Solder Pin: Brass with Tin plated


- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical



- Voltage rating: 300VAC
- Current rating: 30 Amps/way max
- Contact resistance: 20mΩ(max)
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: 1500VAC(lmim) Test time=60sec/1pcs
- Wire range: 10-24AWG

Mechanical:

- Torque: 4kgf.cm/M3
- Operating temperature: -33°C to +120°C
- Soldering ability: 95%coverage(min)
 - Test temperature= 230°C±10°C
 - Test time= 4sec±0.5sec
- Soldering reliability:
 - Test temperature= 250°C±10°C
 - 5 seconds max

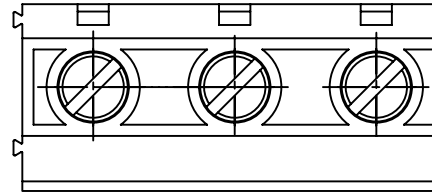


N=Number of contacts

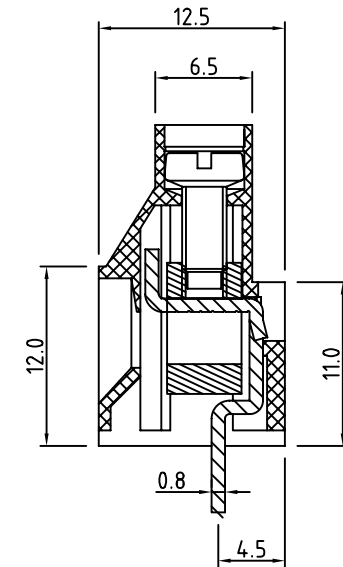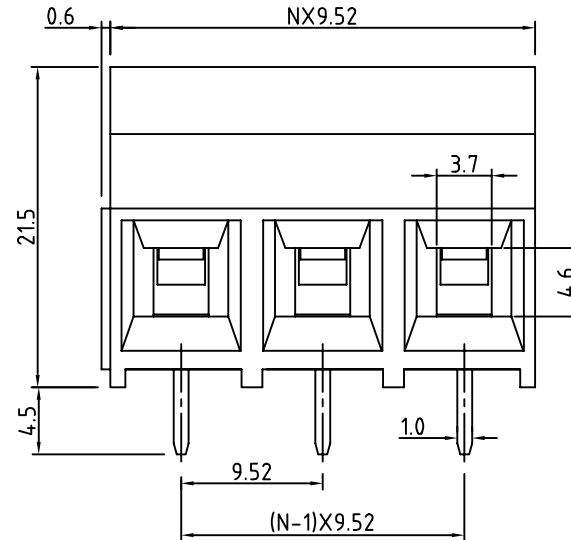

P/N	TBH095-D21E0-xx	TBH095-D21EE-xx	TBH095-D21-xx
DWG			

P.C.B LAYOUT

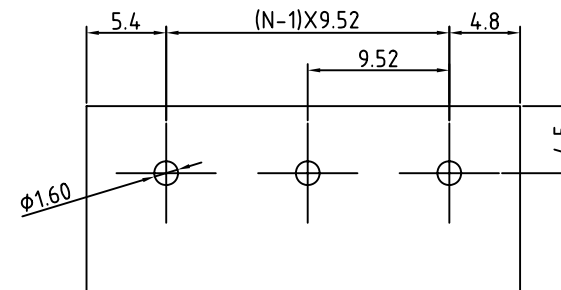

PART NO. TB H095-D21-xx

DWG NO. TB H095-D21-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.3
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司