



MW-R-xx-LF
LEADFREE
RoHS Compliant

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Pantone Color: 7506C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MW-R-02	2.50	7.50
MW-R-03	5.00	10.00
MW-R-04	7.50	12.50
MW-R-05	10.00	15.00
MW-R-06	12.50	17.50
MW-R-07	15.00	20.00
MW-R-08	17.50	22.50
MW-R-09	20.00	25.00
MW-R-10	22.50	27.50
MW-R-11	25.00	30.00
MW-R-12	27.50	32.50
MW-R-13	30.00	35.00
MW-R-14	32.50	37.50
MW-R-15	35.00	40.00
MW-R-16	37.50	42.50

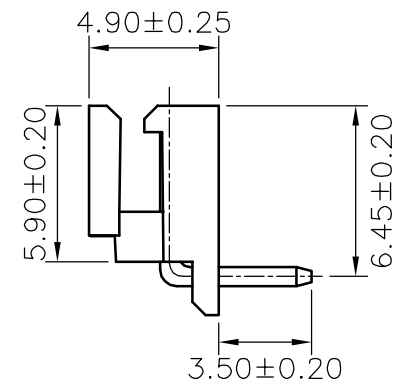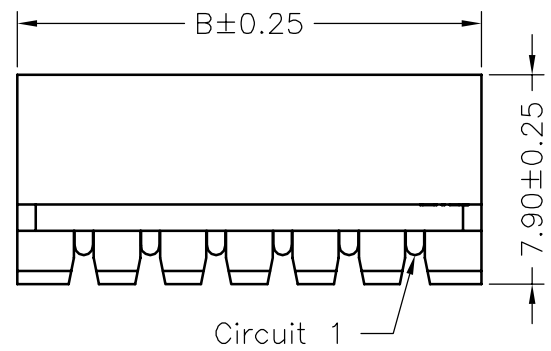

煜倫股份有限公司

PART NO. MW-R-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION: 2.50mm PITCH 90 WAFER
DWG NO. MW-R-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE