


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A


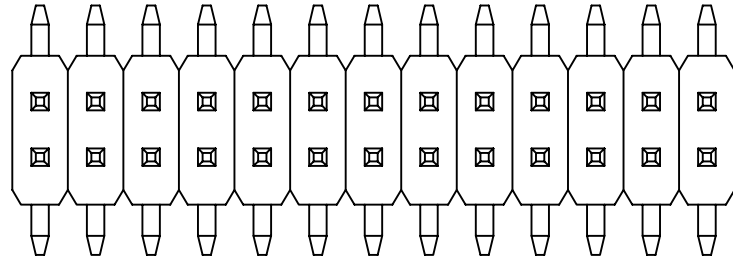


### Specifications


Current Rating: 1Amp  
 Insulation Resistance: 5000Mega ohms Min.  
 Dielectric Withstanding: 600 VAC min  
 Contact Resistance: 30mΩ Max.  
 Operating Temperature: -55°C to +105°C

### Materials

Contact Material: Copper Alloy  
 Insulation Material: Thermoplastic, UL 94V-0

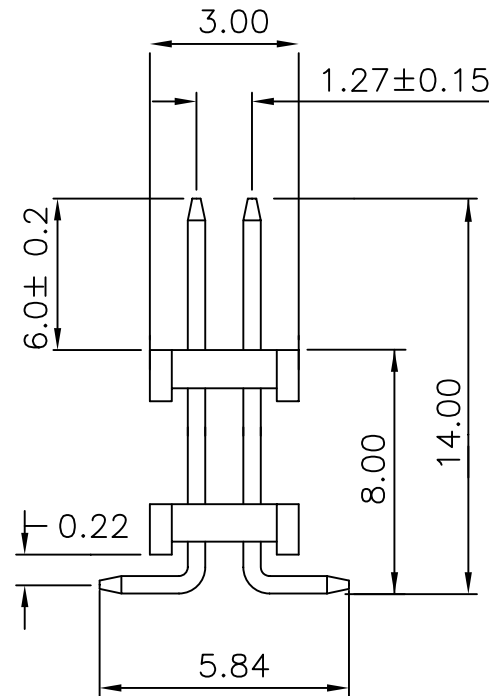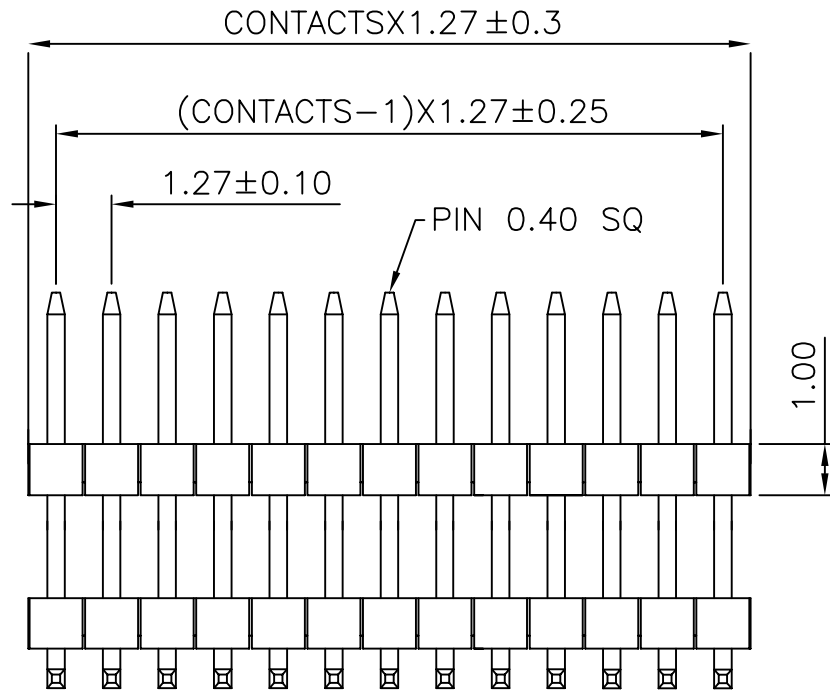

### RECOMMENDED P.C.B LAYOUT

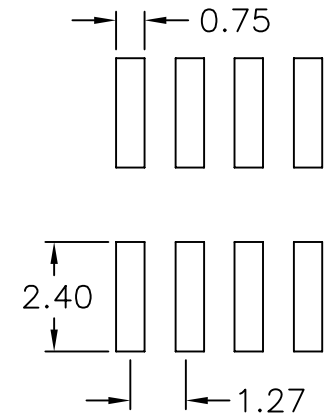

PART NO. PAS-V080X60-2Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG	DESCRIP TION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H	AREA	REVISIONS	HK	DATE
DWG NO. PAS-V080X60-2Xxx		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

焯倫股份有限公司