
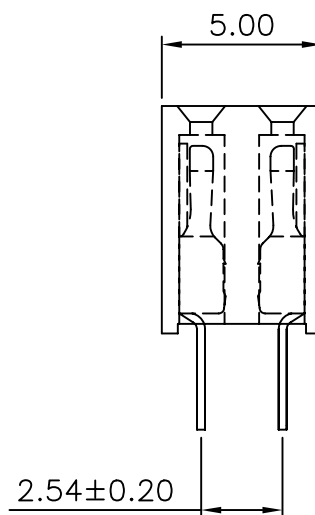
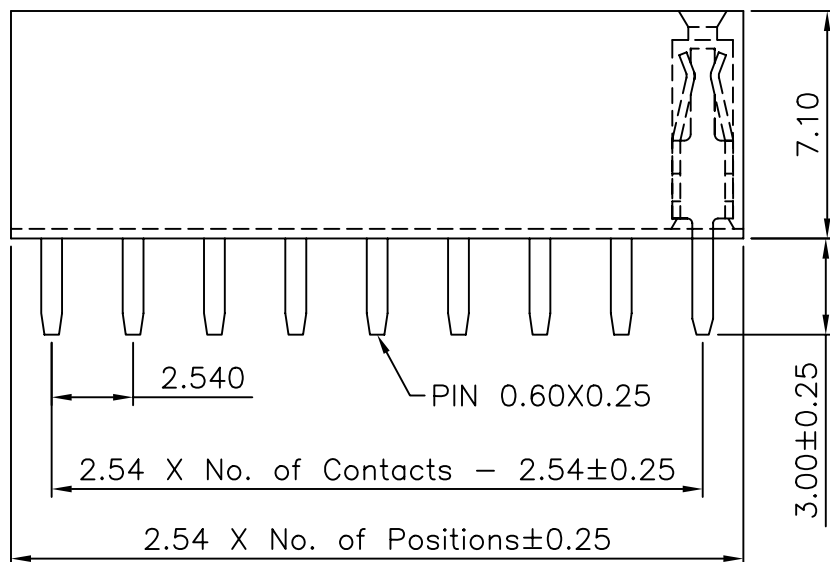


### Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C


### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T  
 All materials must be GP materials

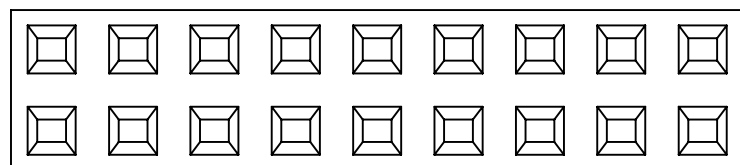

### Recommended P.C.Board

#### Hole Layout

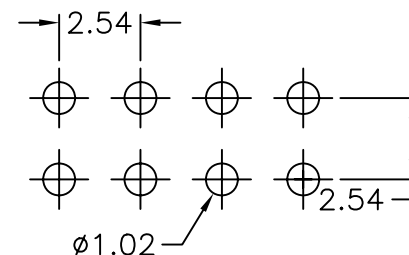

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. F-D71-2Xxx

DWG NO. F-D71-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

.XXX ±

AWG

DESCRIPTION:

2.54 FEMALE HEADER DIP TYPE BASE 7.10H

AREA

REVISIONS

HK

DATE

焯倫股份有限公司