

P.C. Board Layout

- * Poles:2-24
- * Material:Insulator:NYLON66 UL94V-2
- * Contact:1.14mm(.045") square pin,brass,tin plated

Specifications

- * Current rating: 7A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063' (1.6mm)

inches
mm

CIRCUITS	DIMENSION in.(mm)	
	A	B
2		0.213(5.4)
4	0.165(4.20)	0.378(9.6)
6	0.331(8.40)	0.543(13.8)
8	0.496(12.60)	0.709(18.0)
10	0.661(16.80)	0.874(22.2)
12	0.837(21.00)	1.039(26.4)
14	0.992(25.20)	1.205(30.6)
16	1.157(29.40)	1.370(34.8)
18	1.323(33.60)	1.535(39.0)
20	1.488(37.80)	1.701(43.2)
22	1.654(42.00)	1.866(47.4)
24	1.819(46.20)	2.031(51.6)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

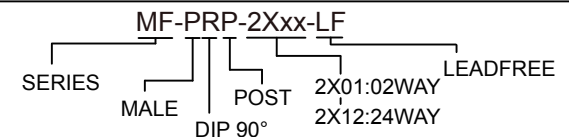

DESCRIPTION: 4.2mm MIN FIT 90° 有柱