
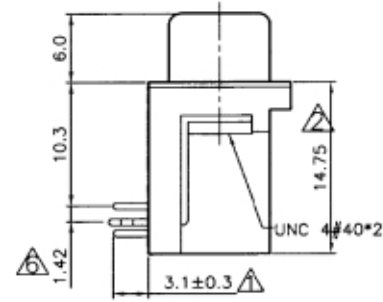


POSITION	A	B	C
DRM-PGN-09	16.92	25.00	30.8
DRM-PGN-15	25.25	33.30	39.2
DRM-PGN-25	38.96	47.10	53.1
DRM-PGN-37	55.42	63.50	69.4

△ SPECIFICATION


MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Shell: Steel
 Rivet, Boardlock: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin/Lead(Brighten Tin) or
 100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL
 Operation Voltage: 250 VAC Max.
 Current Rating: 3 Amps
 Contact Resistance: 15 mohms
 Insulation Resistance: 3000 Mohms Min @ 500 VDC
 Dielectric Withstanding Voltage: 1000 VAC / Minute
 Temperature Range: -55°C TO +105°C

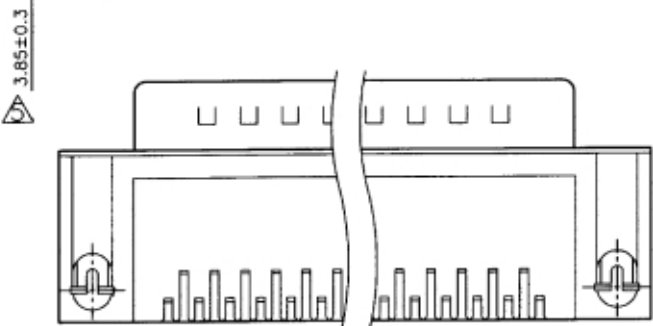

DRM-PGN-xx-LF
 LEADFREE

RoHS Compliant

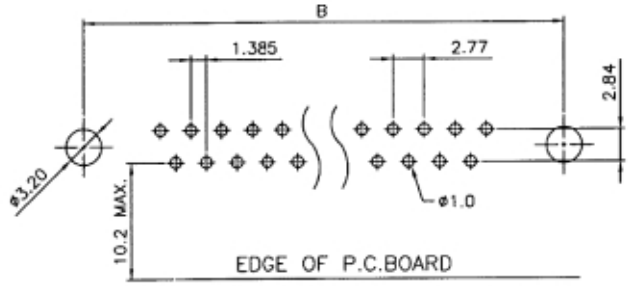

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
 TOLERANCES: ±0.05mm



PART NO. DRM-PGN-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:
DWG NO. DRM-PGN-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司