

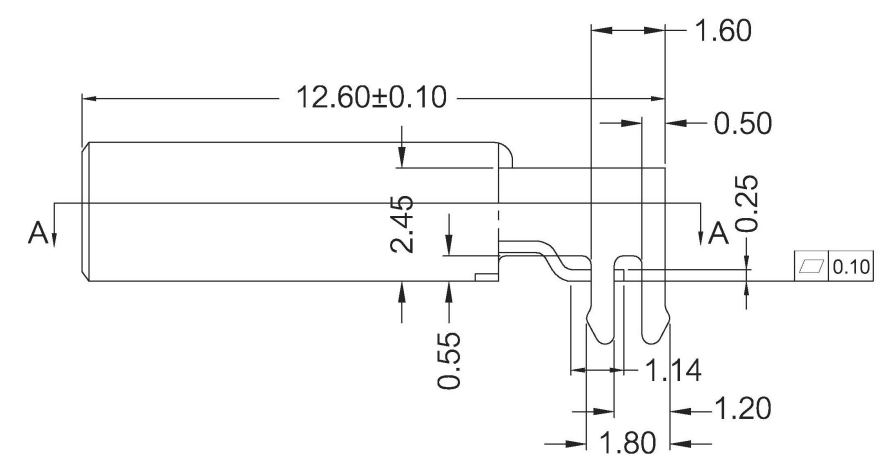


NOTE:  
 1. MATERIAL:  
 1. 1. HOUSING: LCP GLASS FIBRE, UL94V-0;  
 1. 2. SHELL: SPCC, T=0.3, .  
 1. 3. CONTACT: C2680 T=0.25;  
 2. FINISH:  
 2. 1 SHELL: ALL PLATING Ni 100u"min  
 2. 2 CONTACT: CONTACT AREA GOLD FLASH;  
 OTHERS Sn100u";  
 3. ELECTRICAL:  
 3. 1 CURRENT RATING: 1AMP.  
 3. 2 INSULATION RESISTANCE: 1000MOHM MIN;  
 3. 3 CONTACT RESISTANCE: 50mOHM MAX;  
 3. 4 DIELECTRIC WITHSTANDING VOLTAGE:  
 AC 100V FOR 1 MINUTE;  
 3. 5 OPERATING TEMPERATURE: 0° C TO +70° C.  
 4. Mechanical:  
 Mating Force: 35N MAX.  
 Unmating Force: 7N MIN.

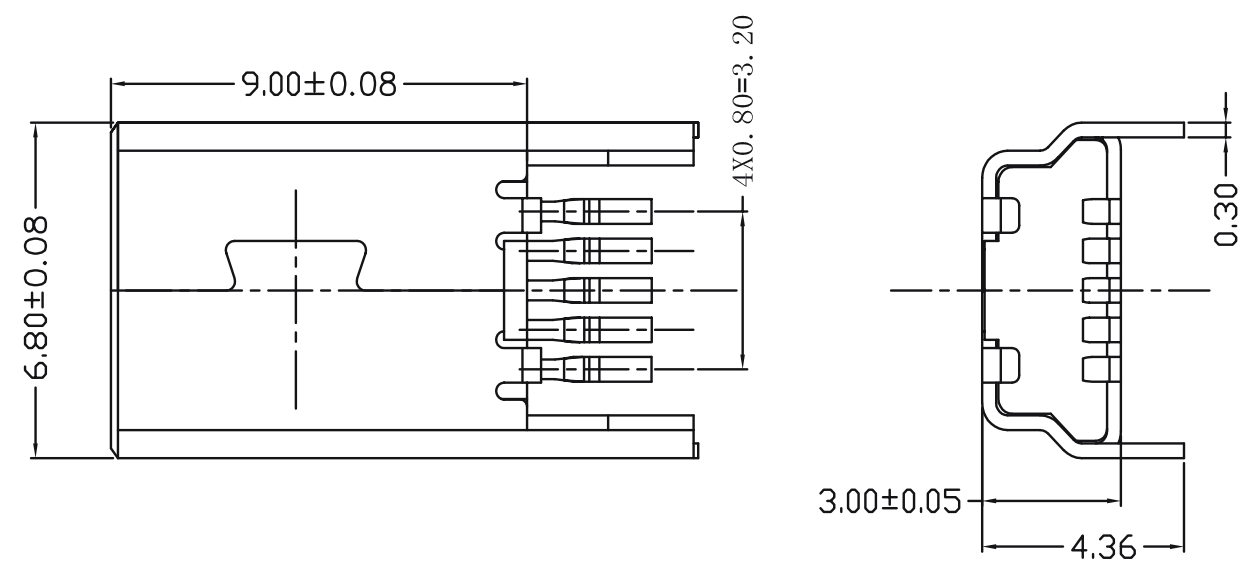

MSB-PWRV-5B-LF  
LEADFREE

RoHS Compliant



PART NO. MSB-PWRV-5B		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION: MINI USB F TYPE 5PIN SMT			
DWG NO. MSB-PWRV-5B		DRAWING BY			AREA	REVISIONS	HK	DATE
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							

煜倫股份有限公司