

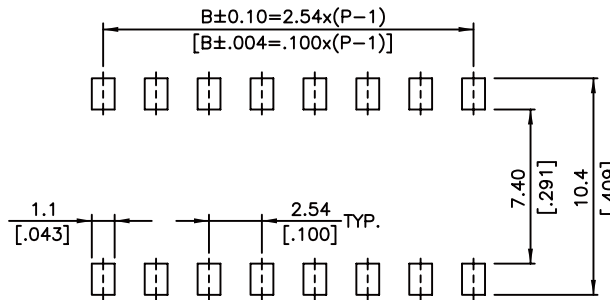
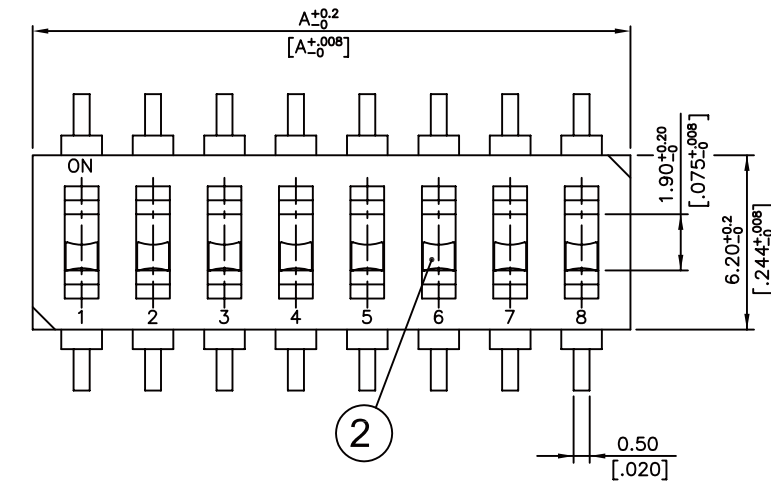


NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
 2. GENERAL TOLERANCES: 10mm OVER - ± 0.20 mm.
 10mm BELOW - ± 0.10 mm.

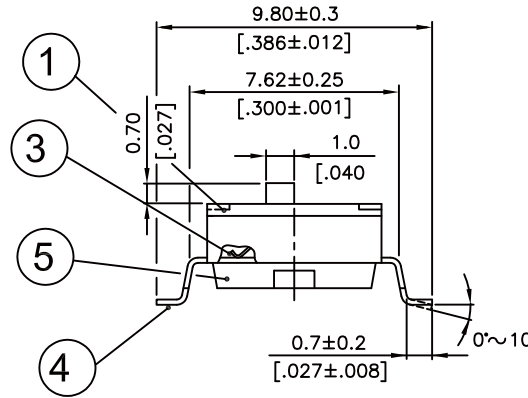


P.C.B. LAYOUT

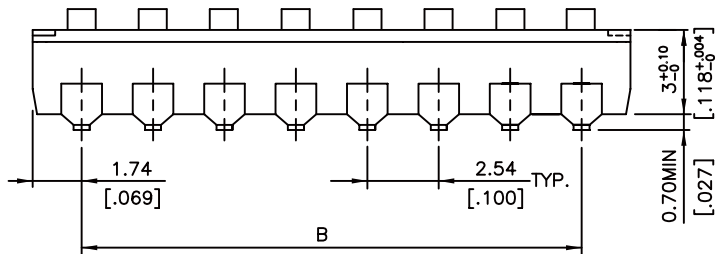

SW-SVC-xx

SW-SV-12	12	31.42[1.237]	27.94[1.100]
SW-SV-10	10	26.34[1.037]	22.86[.900]
SW-SV-09	9	23.80[.937]	20.32[.800]
SW-SV-08	8	21.26[.837]	17.78[.700]
SW-SV-07	7	18.72[.737]	15.24[.600]
SW-SV-06	6	16.18[.637]	12.70[.500]
SW-SV-05	5	13.64[.537]	10.16[.400]
SW-SV-04	4	11.10[.437]	7.62[.300]
SW-SV-03	3	8.56[.337]	5.08[.200]
SW-SV-02	2	6.02[.237]	2.54[.100]
-	-	-	-
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

SCHEMATIC(TYP.)



(1,2,3,4,5,6,7,8,9,10,12, POS AVAIL)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X, \pm
 X, \pm
 .XX \pm
 .XXX \pm
 ANG \pm



ORDER INFORMATION

SW-SV-xx-LF
 SERIES | LEADFREE
 | 02~12WAY
 | 180°SMT
 SLIDE

DESCRIPTION: