


MATERIALS

- 1. HOUSING: HI-TEMP. (UL 94V-0). BLACK.
- 2. TERMINAL: COPPER ALLOY (T=0.15mm). GOLD PLATED OVER NICKEL.
- 3. COVER: STAINLESS STEEL (T=0.2mm)

SPECIFICATION

- 1. CURRENT RATING: 1.0 A. MAX
- 2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE: 1000M Ω MIN. AT 500V DC.
- 4. CONTACT RESISTANCE: 30m Ω MAX
- 5. OPERATING TEMPERATURE: -40°C TO +85°C

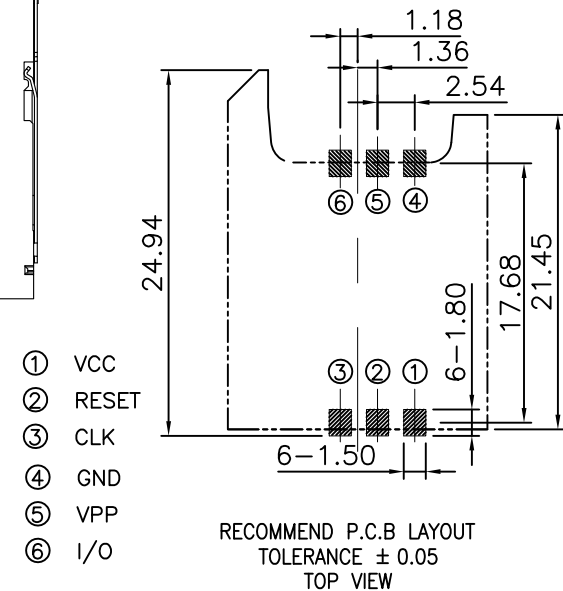

RECOMMEND P.C.B LAYOUT
TOLERANCE ± 0.05
TOP VIEW

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm 0.30
.XX \pm 0.25
.XXX \pm 0.20
ANG \pm

P PROJECTION



ORDER INFORMATION

SCV-W1718X-06-LF
SERIES | | | LEADFREE
| | | 06 WAY
90°SMT | | | NON POST
| | | HIGH 1.80mm
| | | PAD TO PAD 17.68mm

DESCRIPTION: SIM Card Socket Hinge Type H:1.8mm