


3P 180°	4P 210°	5P 180°	5P 240°	6P 240°	7P 270°	8P 270°
DA-P-03	DA-P-04	DA-P-05	DA-P-05B	DA-P-06	DA-P-07	DA-P-08

**SPECIFICATIONS:**

- 1.RATING:100V AC AT 1A
- 2.INSULATION RESISTANCE:  
OVER 100M IHM AT 500V DC
- 3.DIELECTRIC STRENGTH:  
250V AC FOR ONE MINUTE

**MATERIALS:**

- A.COVER: EVA
- B.METAL PART: STEEL NICKEL PLATED
- C.INSULATOR: PBT
- D.PIN CONTACT: BRASS NICKEL PLATED

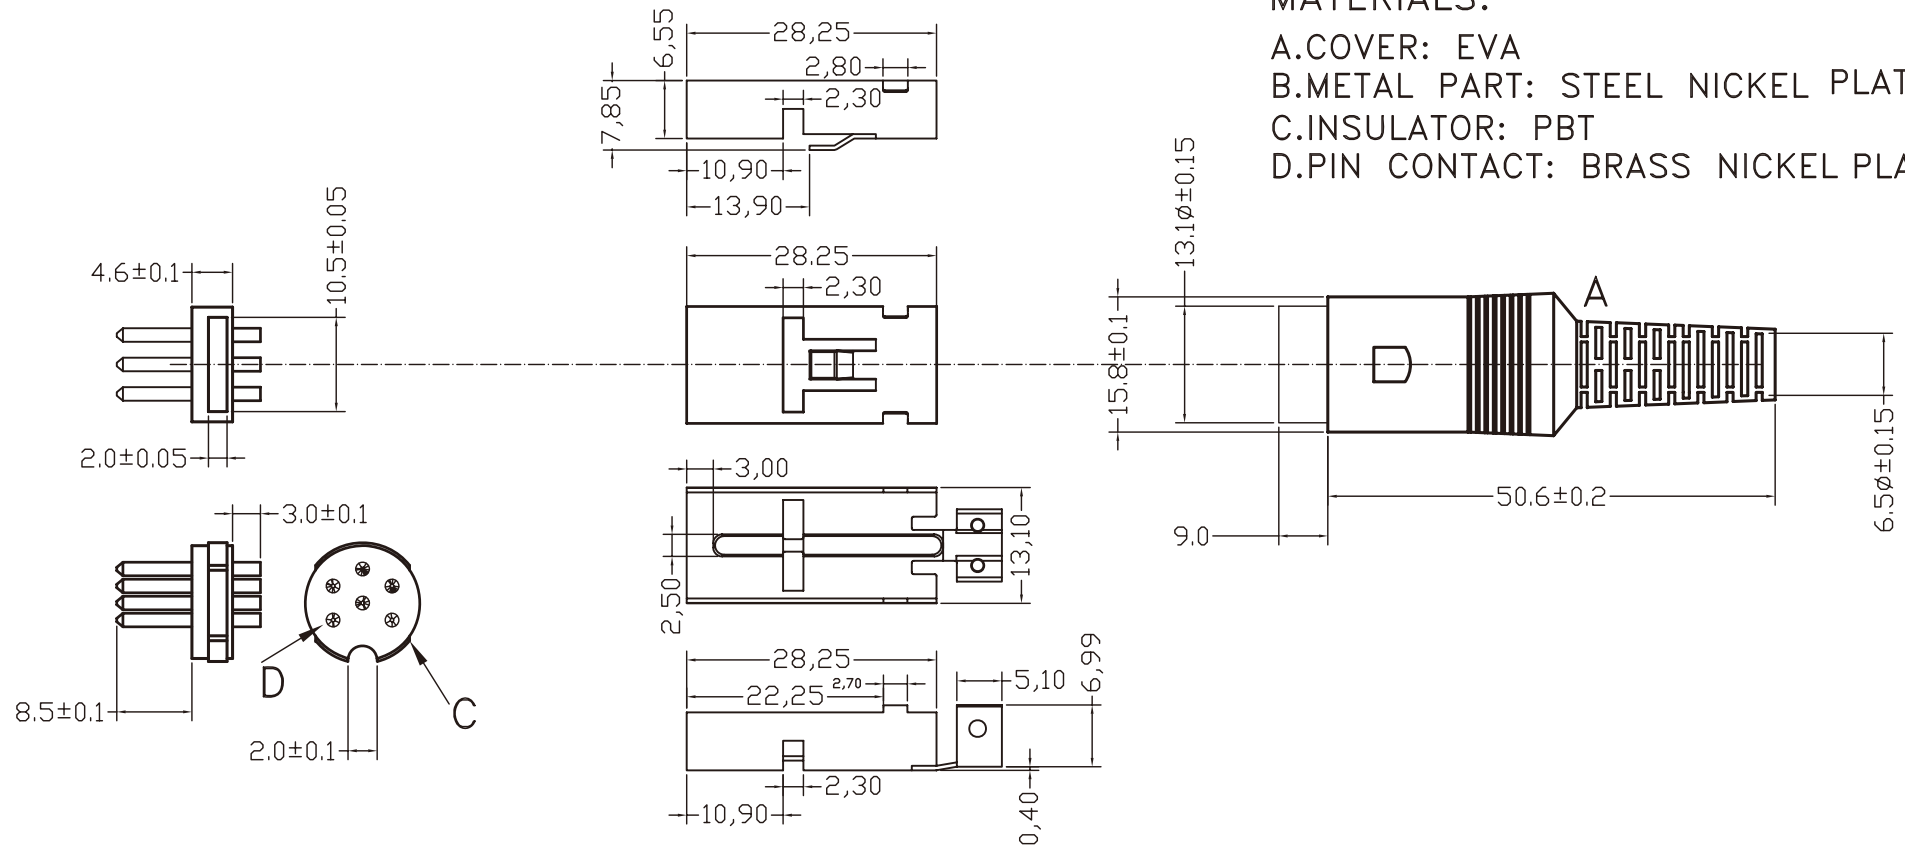

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4 PPROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

DA-P-xx-LF  
SERIES | LEADFREE  
03-08WAY  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DIN PLUG ASS'Y TYPE