

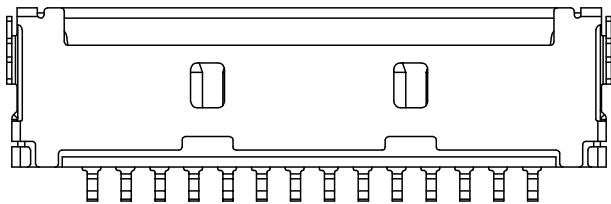



TOERANCE:±0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

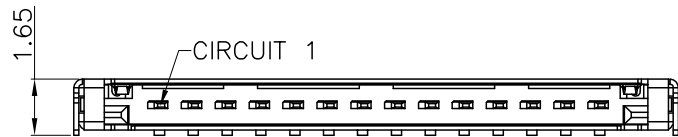

Mating Condition (REF.)

PIN	DIM.(mm)	
	A	B
08	7.00	11.55
14	13.00	17.55
20	19.00	23.55
30	29.00	33.55

NOTES:

- MATERIAL:
INSULATION(HALOGEN FREE): NYLON 9T, UL94V-0 (BLACK)
CONTACT: COPPER ALLOY, t=0.20mm
SHELL: COPPER ALLOY, t=0.15mm / SOLDER AREA GOLD FLASH OVER NICKEL
- CONTACT FINISH: GOLD FLASH OVER NICKEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 3°



ORDER INFORMATION

DF19-WX-xx-LF
SERIES | | LEADFREE
| | 08-30WAY
| | NON POST
90°SMT

DESCRIPTION: