
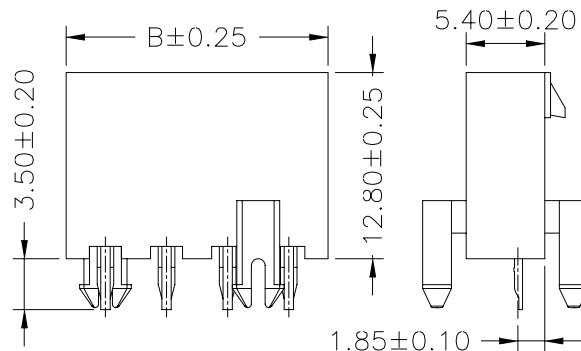
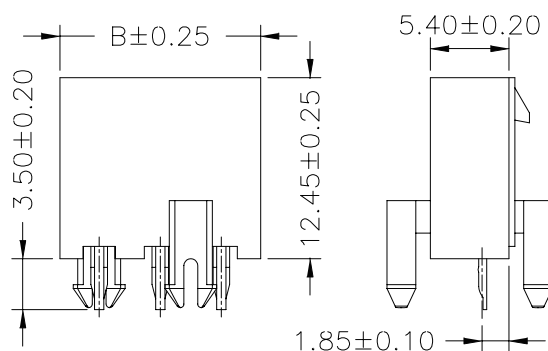
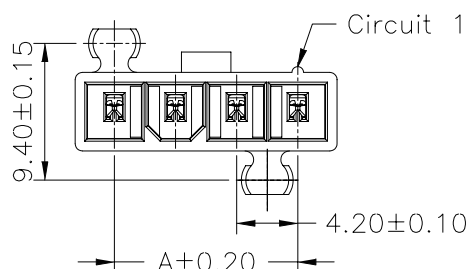
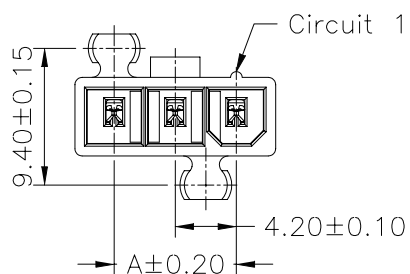


P.C.B LAYOUT

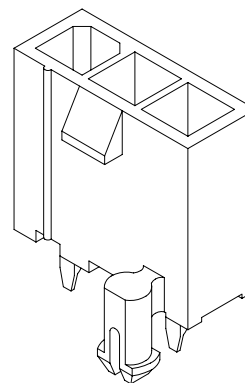

3P

4P,5P

**SPECIFICATIONS**

Current Rating: 7A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-2

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
<b>MF-PDP-1X03</b>	8.40	13.80
<b>MF-PDP-1X04</b>	12.60	18.00
<b>MF-PDP-1X05</b>	16.80	22.20

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4 PPROJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



**ORDER INFORMATION**

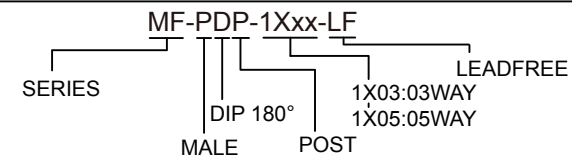

DESCRIPTION: 4.20mm PITCH 180° WAFER WITH FOOT, SINGLE ROW, MINI-FIT