


1 2 3 4 5 6 7 8 9 0

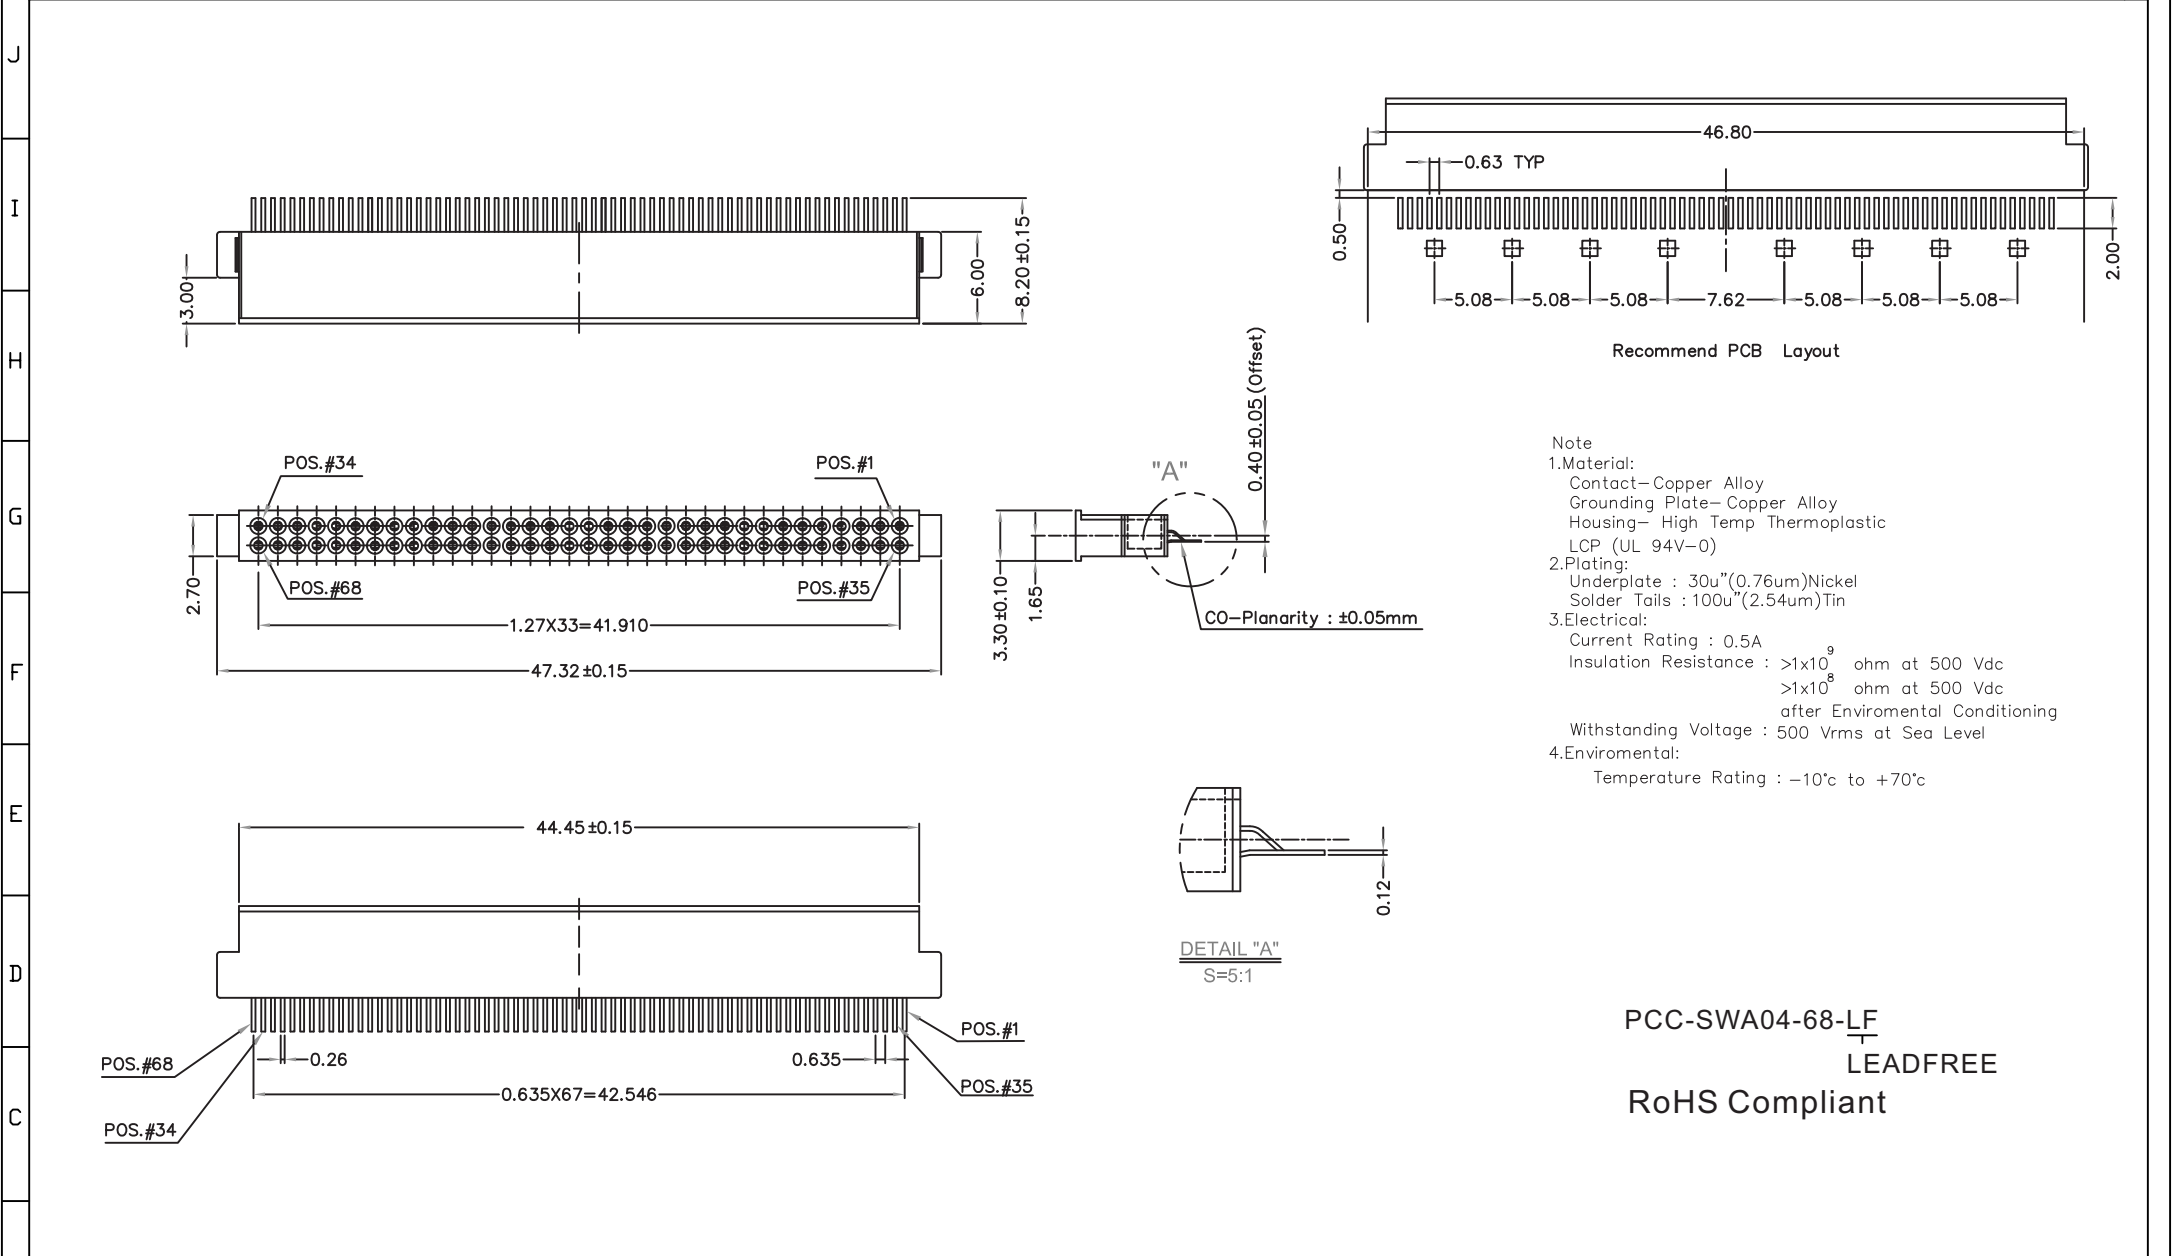

Note  
 1.Material:  
 Contact-Copper Alloy  
 Grounding Plate-Copper Alloy  
 Housing- High Temp Thermoplastic  
 LCP (UL 94V-0)  
 2.Plating:  
 Underplate : 30u"(0.76um)Nickel  
 Solder Tails : 100u"(2.54um)Tin  
 3.Electrical:  
 Current Rating : 0.5A  
 Insulation Resistance : >1x10<sup>9</sup> ohm at 500 Vdc  
 >1x10<sup>8</sup> ohm at 500 Vdc  
 after Enviromental Conditioning  
 Withstanding Voltage : 500 Vrms at Sea Level  
 4.Enviromental:  
 Temperature Rating : -10°c to +70°c

PCC-SWA04-68-LF  
 LEADFREE  
 RoHS Compliant

B			PART NO. PCC-SWA04-68		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: PC Card 68 pin connect					
			DWG NO. PCC-SWA04-68				CHECKED BY CY				
A			FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE	
			UNIT / mm	SCALE 1:1	PROJECTION						