


Recommended
P.C. Board Layout

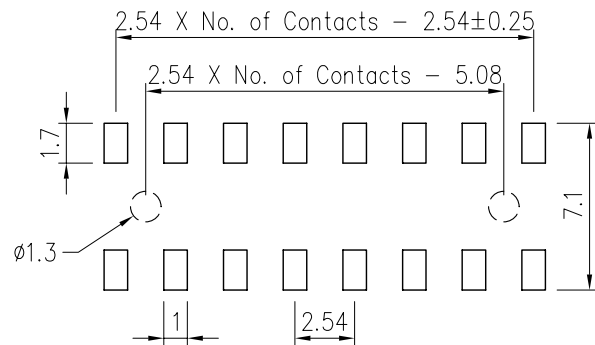

Specifications

Current Rating : 3 Amps

Insulator Resistance : 5000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C

Max. Processing Temp. : 230°C For 30~60 Seconds
(260°C For 10 Seconds)

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0

Standard : Nylon-6T

Contact Plated : Full Gold, Full Tin, Selective Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

F-V37PC-2Xxx-LF
SERIES | LEADFREE
180°SMT | 2X02:04WAY
HIGH 3.7mm | CAP | 2X40:80WAY
POST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Female Header P2.54mm Profile : 3.5mm, Dual Rows, SMT Type