




SECTION: A-A

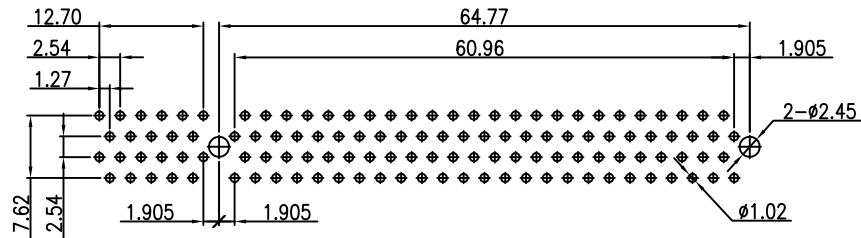

NOTE:  
 MATERIAL:  
 HOUSING: THERMOPLASTIC; (NYLON) UL 94V-0/UL 94V-2  
 CONTACT: BRASS  
 PLATING: MATING AREA-SELECTED GOLD OVER NICKEL  
           SOLDER AREA-TIN OVER NICKEL  
 SPECIFICATION:  
 VOLTAGE RATING: 250V  
 CURRENT RATING: 1A  
 CONTACT RESISTANCE TERMINAL: 30m Ω MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MIN  
 INSULATION RESISTANCE: 1000M Ω MIN

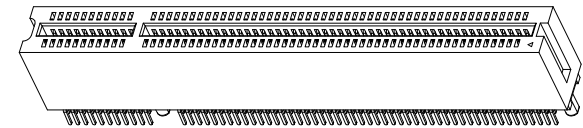

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION



ORDER INFORMATION



DESCRIPTION: