




Material:


Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -55°C~+105°C .
Nickel thickness: 50~120u"

***RoHS Compliant**

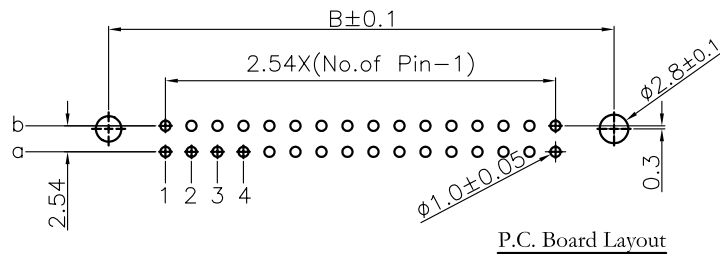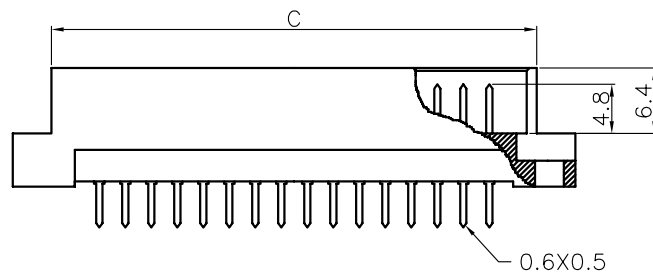

Position	A	B	C	D
20	39.76	34.12	32.16	29.36
Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	20	a b		UB-PD-2X10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE


SIZE A4

P PROJECTION 

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm



ORDER INFORMATION

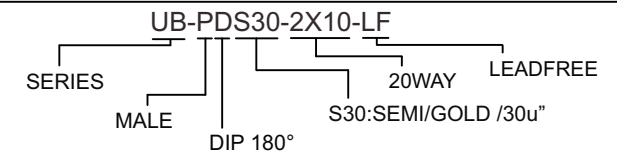

DESCRIPTION: