




P.C.B. LAYOUT

SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT30%GF,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MIF-PRP-2X01	---	6.65
MIF-PRP-2X02	3.00	9.65
MIF-PRP-2X03	6.00	12.65
MIF-PRP-2X04	9.00	15.65
MIF-PRP-2X05	12.00	18.65
MIF-PRP-2X06	15.00	21.65
MIF-PRP-2X07	18.00	24.65
MIF-PRP-2X08	21.00	27.65
MIF-PRP-2X09	24.00	30.65
MIF-PRP-2X10	27.00	33.65
MIF-PRP-2X11	30.00	36.65
MIF-PRP-2X12	33.00	39.65

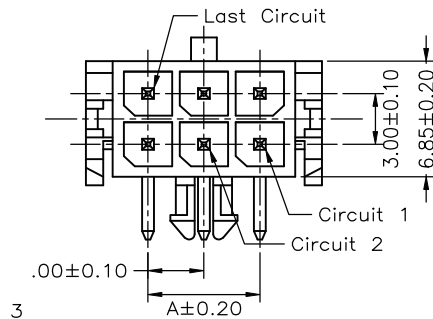

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1:1


DATE

SIZE A4 PPROJECTION

X, ± 0.30
 .X ± 0.30
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

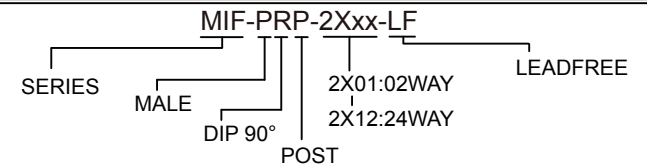

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.00mm PITCH 90° WAFER, MICRO-FIT