

• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic thermoplastic  
P.B.T UL94V-0 black  
Contacts: Phosphor bronze gold  
selective plated  
Front Shell: Steel nickel plated  
over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: 500MΩ/Min  
Contact Resistance: 35mΩ/Max  
Operaion Temperature: -55°C ~ +105°C

**HPC-PFQ-026-LF**  
LEADFREE

**RoHS Compliant**



PART NO. **HPC-PFQ-026**

DWG NO. **HPC-PFQ-026**

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE  
.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIP TION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA



REVISIONS

HK

DATE

1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

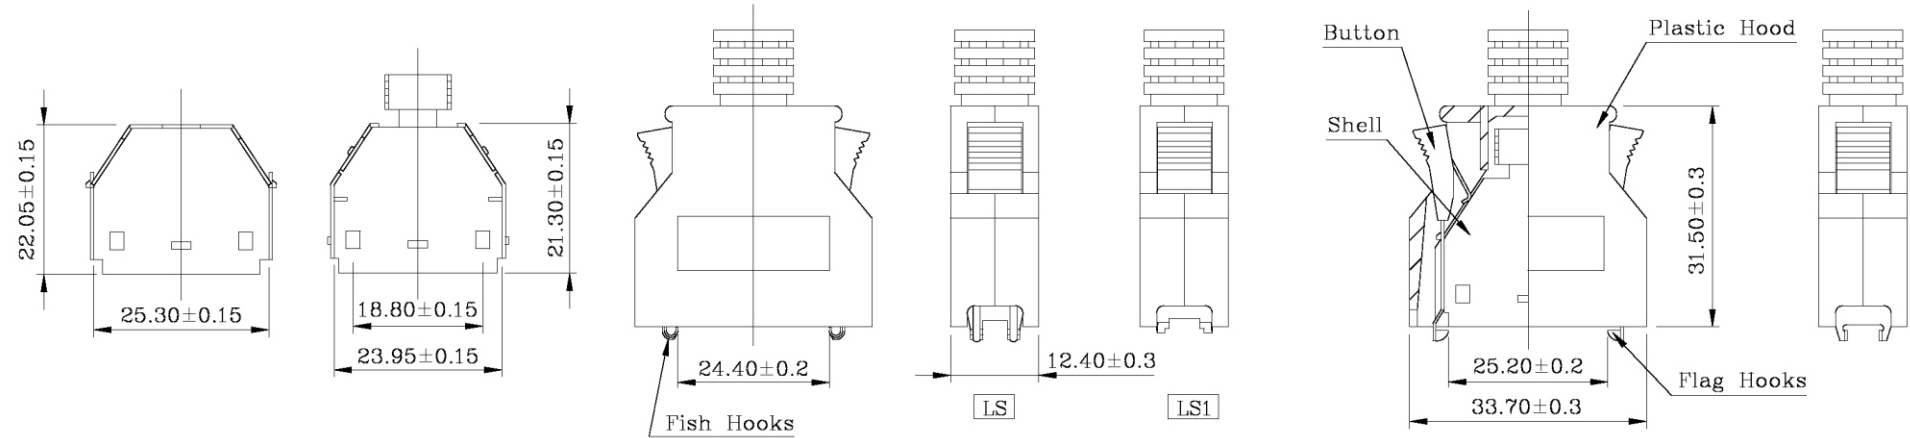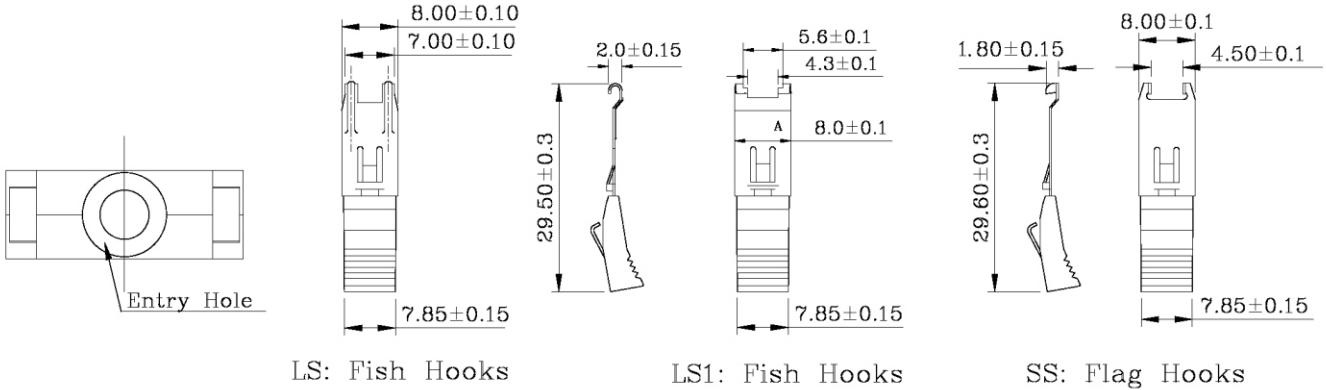

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. **HPC-PFQ-026**

DWG NO. **HPC-PFQ-026**

CHECKED BY **CY**

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE