

FEATURES:




- Half pitch 1.27mm(.050") series
- D-SUB female connector for 0.635mm(.025") pitch flat cable
- Panel mount receptacle assemblies bracket with latch block and without latch block
- Die-Cast body provided EMI/RFI shielded

MATERIALS:


- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Bracketshell: Die-Cast zinc nickel plated over copper

ELECTRICAL:


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

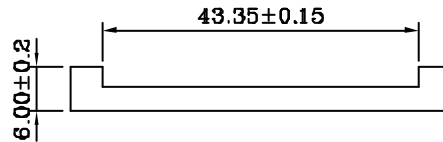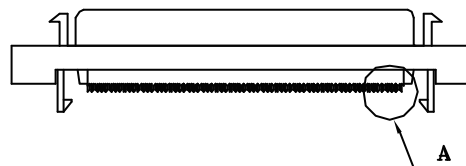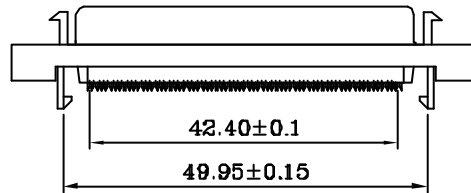

Cover



View A

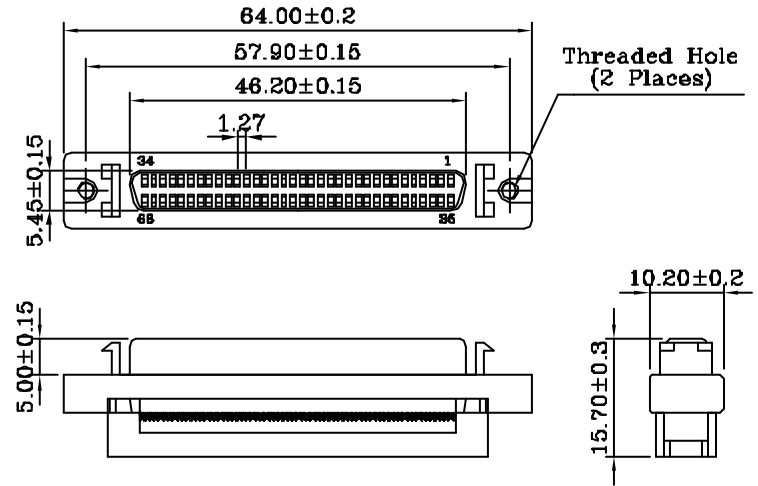

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm
DATE

SCALE 1:1

SIZE A4

PROJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

HPD-SFL-068-LF
SERIES | LEADFREE
68 WAY
LOCK
IDC
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 68P Female Connector I.D.C For 0.635mm(.025") Flat Cable