


Recommend P.C.B Layout.

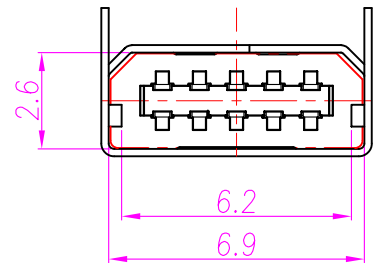

MSB-SW2M-10D-LF
LEADFREE
RoHS Compliant

備註/NOTE:

- 1.安規/SAFETY:
 - 1-1.Temperature rise: 0.3Aac/30Vac.
 - 1-2.Insulation resistance: 500Vac/1min.
 - 1-3.Dielectric withstanding voltage: 250Vac/0.5mA/1min.
 - 1-4.Low level resistance: full scale voltage 20mV/current 10mA.
 - 1-5.Durability: 12000cycles-200mm/min.
- 2.材質/MATERIAL:
 - 2-1.膠芯/HOUSING: LCP.
 - 2-2.端子/PIN: 磷銅/PHOSPHOR BRONZE.
 - 2-3.鐵殼/SHELL: 磷銅/PHOSPHOR BRONZE.
- 3.電鍍/PLATING:
 - 3-1.端子/PIN:前金30u"後鍍/GOLD30u" TIN. Δ
 - 3-2.鐵殼/SHELL: 霧鍍/TIN.



PART NO. MSB-SW2M-10D		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: MINI USB 10PIN (F) DIP
DWG NO. MSB-SW2M-10D		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司