


Straight angle

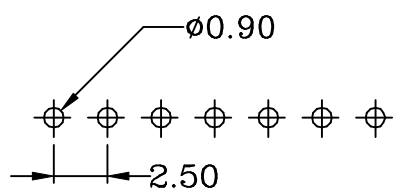

P.C.B. LAYOUT

Features:

- \* Available in 3 through 15 circuits
- \* Material: Insulator: Nylon 66 UL 94V-0  
Contact: Phosphor Bronze, tin plated
- \* Box-shaped shrouded

XH-SD-xx-LF  
LEADFREE

RoHS Compliant

Dimensional & Ordering Information:

Circuits	Part No	Dimensions			PCS/BOX
	Straight angle	A	B	C	
3	XH-SD-03	5.00	10.00	8.20	500
4	XH-SD-04	7.50	12.50	10.70	500
5	XH-SD-05	10.00	15.00	13.20	500
6	XH-SD-06	12.50	17.50	15.70	500
7	XH-SD-07	15.00	20.00	18.20	250
8	XH-SD-08	17.50	22.50	20.70	250
9	XH-SD-09	20.00	25.00	23.20	250
10	XH-SD-10	22.50	27.50	25.70	250
11	XH-SD-11	25.00	30.00	28.20	200
12	XH-SD-12	27.50	32.50	30.70	200
13	XH-SD-13	30.00	35.00	33.20	200
14	XH-SD-14	32.50	37.50	35.70	100
15	XH-SD-15	35.00	40.00	38.20	100

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. XH-SD-xx

DWG NO. XH-SD-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

