

MATERIAL AND FINISH

\*HOUSING:P.P.S OR NYLON.

\*CONTACT:PHOSPHOR BRONZE TIN PLATING 120 MICRO INCH.

PERFORMANCE SPECIFICATION:


\*CURRENT:1 AMPERE MAX.

\*OPERATING TEMPERATURE:-55°C TO +105°C.

\*INSULATION RESISTANCE: 10,000 MEGOHMS MIN. INITIAL.

\*NORMAL FORCE:200 GRAMS MIN. ON TIN/TIN AND INTERFACE.

\*DURABILITY:40 CYCLES MIN.

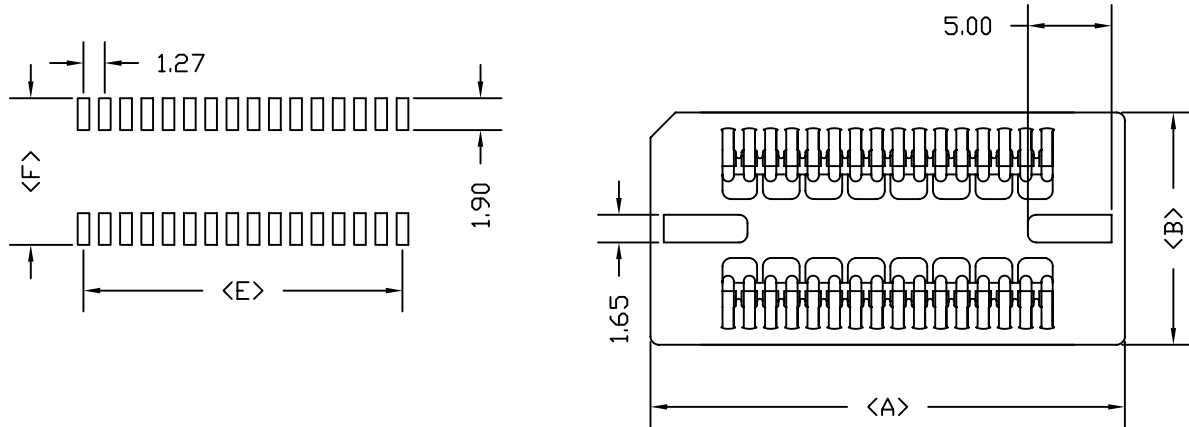

P. C. B LAYOUT

SOJ-V<sub>X</sub>-xx-LF  
LEADFREE  
S:SMALL ROW PITCH  
L:LARGE ROW PITCH

RoHS Compliant

PART NO.	A±0.2	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2
24S	23.26	13.87	16.36	8.05	13.97	8.76
26S	24.53	13.87	17.63	8.05	15.24	8.76
28S	25.80	13.87	18.90	8.05	16.51	8.76
32S	28.34	13.87	21.44	8.05	19.05	8.76
28L	25.80	16.41	18.90	10.7	16.51	11.3
32L	28.34	16.41	21.44	10.7	19.50	11.3
40L	33.40	16.41	26.50	10.7	24.13	11.3
42L	34.67	16.81	27.77	10.7	25.40	11.3



PART NO. SOJ-V<sub>X</sub>-xx

DWG NO. SOJ-V<sub>X</sub>-xx

APPROVED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.25  
.XX ± 0.15  
.XXX  
AWG

DESCRIPTION: SURFACE MCUNT SOJ SOCKET

焜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------