

1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass





SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature : -55°C to +105°C

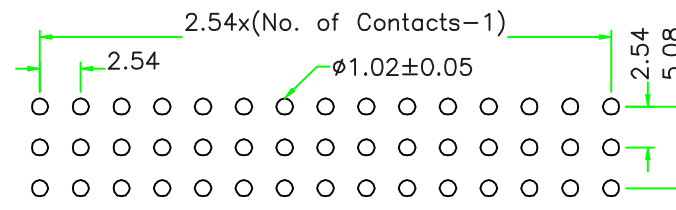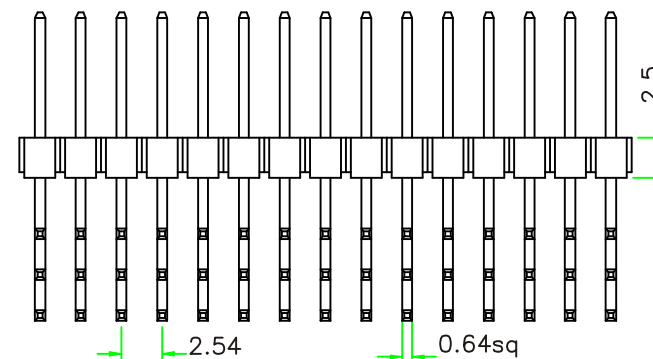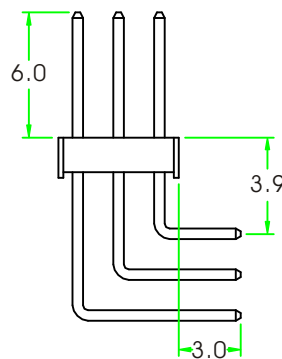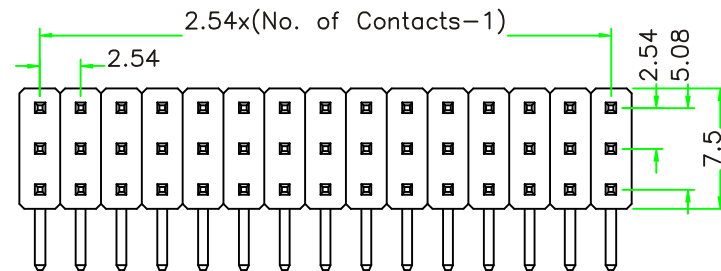

Recommended P.C.B. Layout



PART NO. H-R-3Xxx

DWG NO. H-R-3Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: 2.54MM PIN HEADER RIGHT ANGLE TYPE

FILE NO.

DRAWING BY

.X ±
.XX ±
.XXX ±
AWG

AREA REVISIONS HK DATE

焯倫有限公司

UNIT / mm SCALE 1:1

PROJECTION