
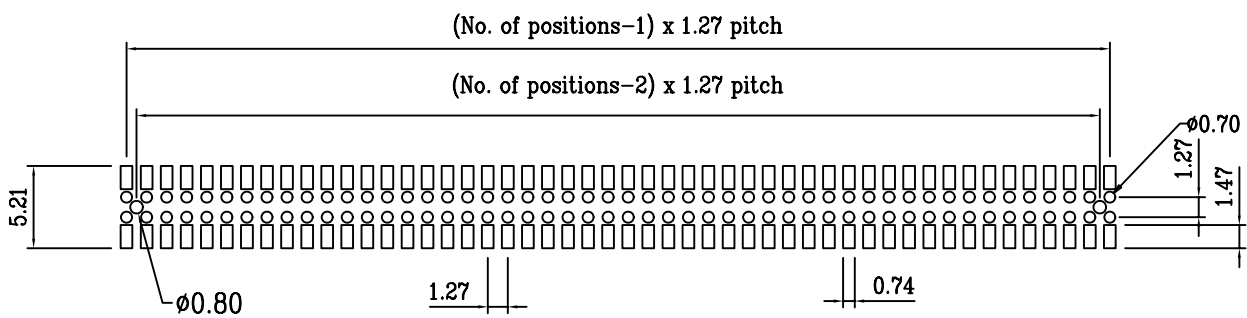

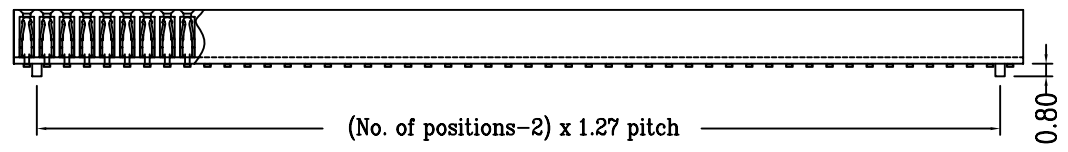


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°~+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

YA-V36P-2Xxx-LF
LEADFREE

RoHS Compliant

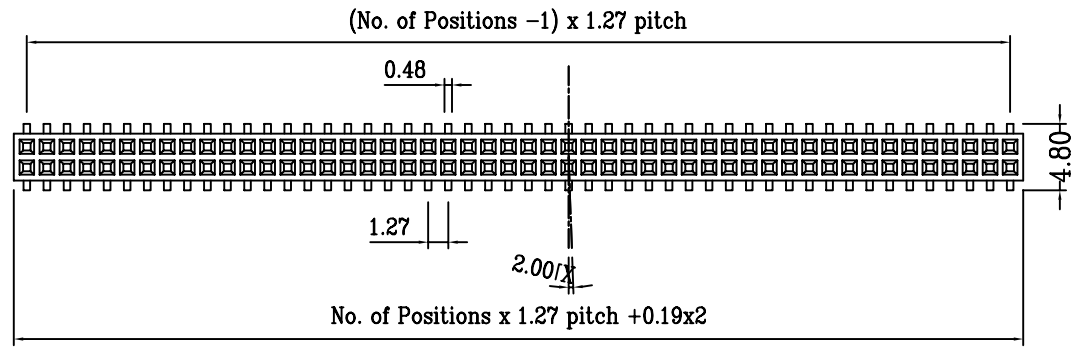

Recommended P.C.B. Layout



PART NO.	YA-V36P-2Xxx		CHECKED BY	CY		TOLERANCES ARE	DESCRIP TION:	Dual Row 1.27x1.27 SMD (H=3.6mm)			
	DWG NO.	YA-V36P-2Xxx		DRAWING BY				AREA	REVISIONS	HK	DATE
FILE NO.			PROJECTION			.X ± 0.15					
UNIT / mm	SCALE	1 : 1				.XX ± 0.10					
						.XXX ± 0.05					
						AWG					

煜倫股份有限公司