


Specifications:

Current rating: 1.0A AC/DC
 Voltage rating: 100V AC/DC
 Contact resistance: 15m ohm. max.
 Insulator resistance: 5000M ohm. Min.
 Withstanding voltage: 1000V AC for one minute
 Operating temperature range: -40°C to $+105^{\circ}\text{C}$
 Material and Finish:
 Insulator: PBT (UL94V-0)
 Standard Color: Black
 Contact: Beryllium Copper (Becu) Gold Plated
 Sleeve Barrel: Copper Alloy Tin Plated

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
24	30.48	27.94	17.78	15.24	06
28	35.56	33.02	17.78	15.24	
32	40.64	38.10	17.78	15.24	
40	50.80	48.26	17.78	15.24	
42	53.34	50.80	17.78	15.24	
48	60.96	58.42	17.78	15.24	

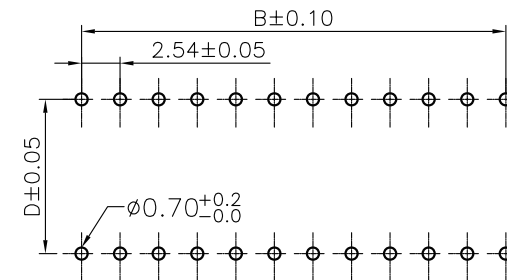

PCB Layout

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES


煜倫股份有限公司

www.morethanall.com


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE
 SIZE A4 PPROJECTION

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

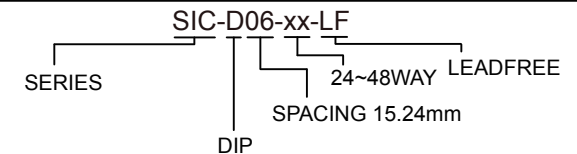

DESCRIPTION: 2.54mm IC Socket Machine Pin