
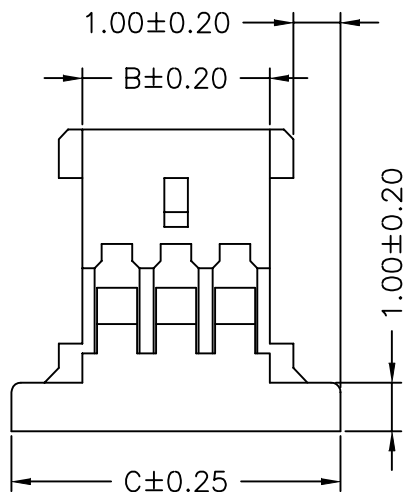
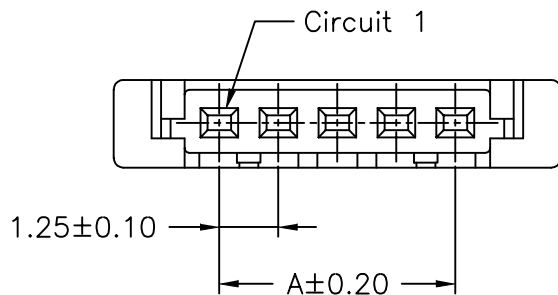



SPECIFICATIONS  
 Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0

Information & Dimensions


PART NO.	Dimensions		
	A	B	C
<b>PNM-H-02</b>	1.25	2.72	5.72
<b>PNM-H-03</b>	2.50	3.97	6.97
<b>PNM-H-04</b>	3.75	5.22	8.22
<b>PNM-H-05</b>	5.00	6.47	9.47
<b>PNM-H-06</b>	6.25	7.72	10.72
<b>PNM-H-07</b>	7.50	8.97	11.97
<b>PNM-H-08</b>	8.75	10.22	13.22
<b>PNM-H-09</b>	10.00	11.47	14.47
<b>PNM-H-10</b>	11.25	12.72	15.72
<b>PNM-H-11</b>	12.50	13.97	16.97
<b>PNM-H-12</b>	13.75	15.22	18.22
<b>PNM-H-14</b>	16.25	17.72	20.72
<b>PNM-H-15</b>	17.50	18.97	21.97
<b>PNM-H-20</b>	23.75	25.22	28.22
<b>PNM-H-30</b>	36.25	37.72	40.72

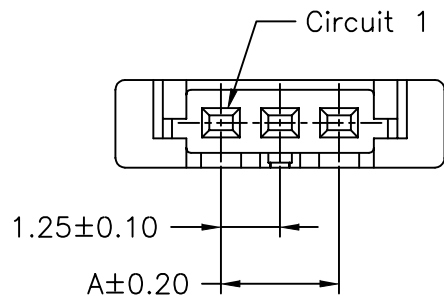

2~3P

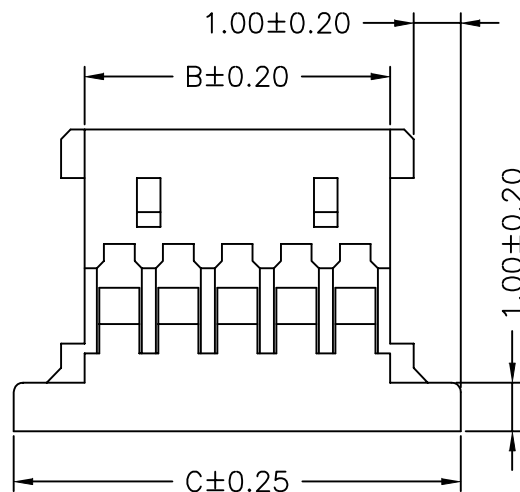

4P以上

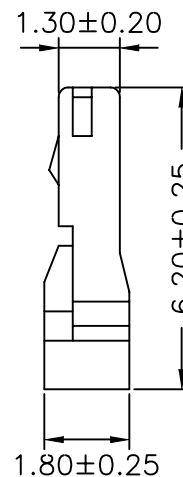

PNM-H-xx-LF

LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. PNM-H-xx

DWG NO. PNM-H-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

1.25mm PITCH  
HOUSING ULTRA LOW PROFILE

AREA

REVISIONS

HK

DATE