
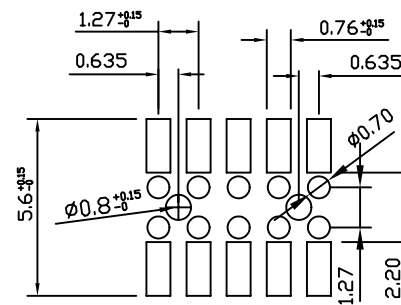


MATERIALS:
 INSULATOR: NYLON-6T, UL94V-0
 COLOUR-BLACK
 CONTACTS: BRASS, GOLD FLASH
 OVER NICKEL PLATED CONTACT AREAS,
 TIN PLATED SOLDER TAILS.

ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 30 MILLION OHMS MAX.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -40°C ~ +105°C
 MAX. PROCESSING TEMPERATURE: 230°F FOR 30/60 SEC.
 260°F FOR 10 SEC.

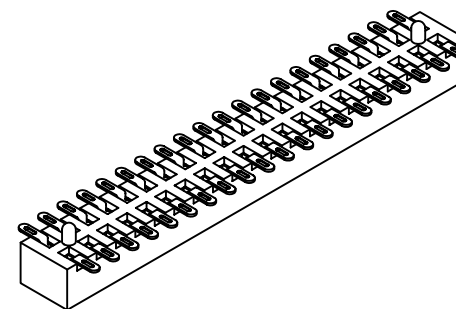

Recommended P.C. Board
 SMD Layout

MORE THAN ALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. YA-Z23P-2Xxx

DWG NO. YA-Z23P-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ±0.2
 XX ±0.2
 .XXX
 AWG

DESCRIPTION:			
AREA	REVISIONS	HK	DATE