

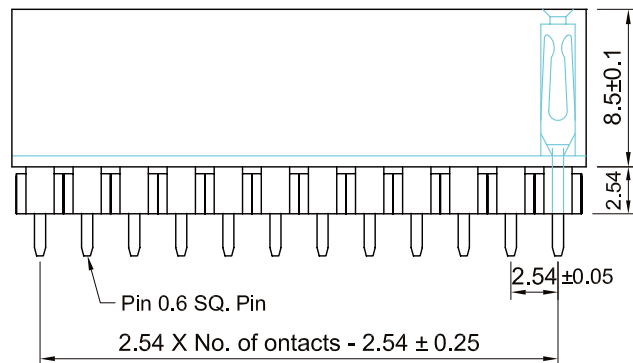


Recommended P.C. Board Hole Layout



1 Story

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass

Insulator Material : Polyester, UL 94V-0 P.B.T.

Contact Plated : See Option / Standard: Full Gold Flash

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE


SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

煜倫股份有限公司

www.morethanall.com



ORDER INFORMATION

FE-D13A-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X40:40WAY
TOTAL HIGH 13.34mm
DIP 180°

DESCRIPTION: Female Header P2.54mm Elevated Story, Single Row, Straight Type