
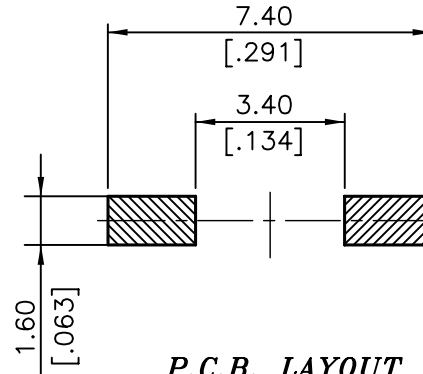




NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX.±0.20mm.

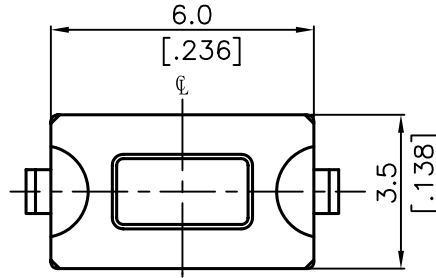

P.C.B. LAYOUT

CIRCUIT DIAGRAM

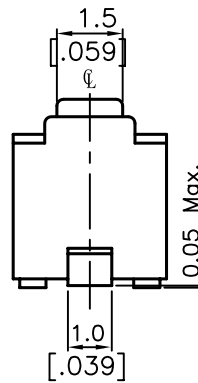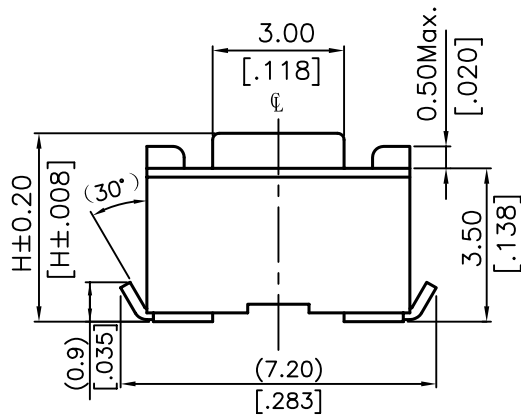

TSW36-V50J-xxx	5.0 [0.197]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
TSW36-V43J-xxx	4.3 [0.169]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
PROD. NO.	H	COLOR FOR OPERATING FORCE	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG±

SIZE A4

PJECTION



ORDER INFORMATION

TSW36-VxxJ-xxx-LF
SERIES | LEADFREE
180°SMT | 160:160g
260:260g
320:320g
520:520g
43:HIGH 4.3mm J FOOT
50:HIGH 5.0mm J FOOT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: TACTILE SWITCH (3.5x6) (S.M.T TYPE)