

DIN 41612 EUROCARD CONNECTORS

Right Angle Female Type Q Connectors

Technical data

EURO DIN 41612:

Housing:

Contact:

Plating:

Operating temperature:

Contact resistance:

Insulator resistance:

Current rating:

Withstanding voltage:

Contact Rating:

RoHS Compliant

Signal

PBT & 30%Class Fiber(UL94-0)

Female : Phosphor Bronze,lead free
2U" Au plated on contact area,
Tin plated on tail

-55°C~+105°C




30m(ohm)max.at DC 500V

1000M(ohm)min.at DC 500V




2 AMP

AC 1000V for 1 minute

Class 3

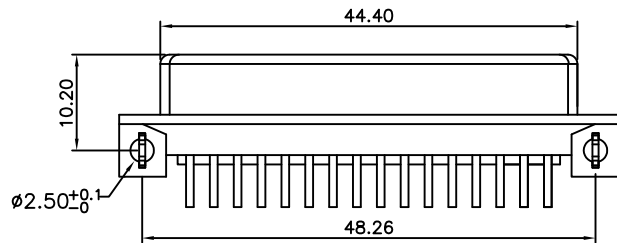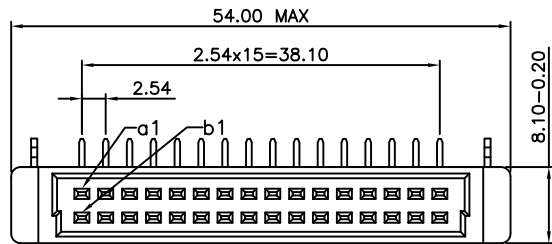

Recommended P.C.B.
layout

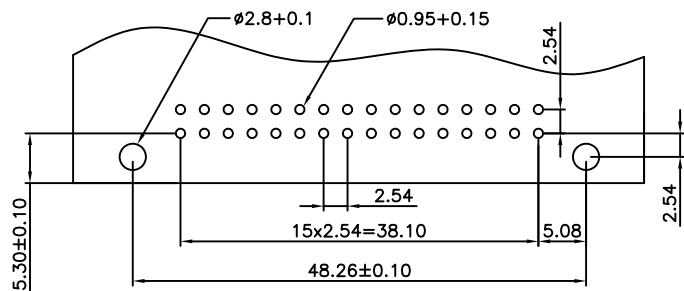

UB-SRZ-2X16-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. UB-SRZ-2X16

DWG NO. UB-SRZ-2X16

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG


DESCRIPTION:

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE