


SPECIFICATIONS
 Voltage rating: 300V AC,DC
 Current rating: 12A AC,DC
 Withstanding voltage: 1500V AC/minute
 Insulation resistance: 1000M Ωmin
 Temperature range: -25°C~+90°C
 Material: UL94V-2 nylon 66



UL-P-1Xxx-LF
 LEADFREE

RoHS Compliant

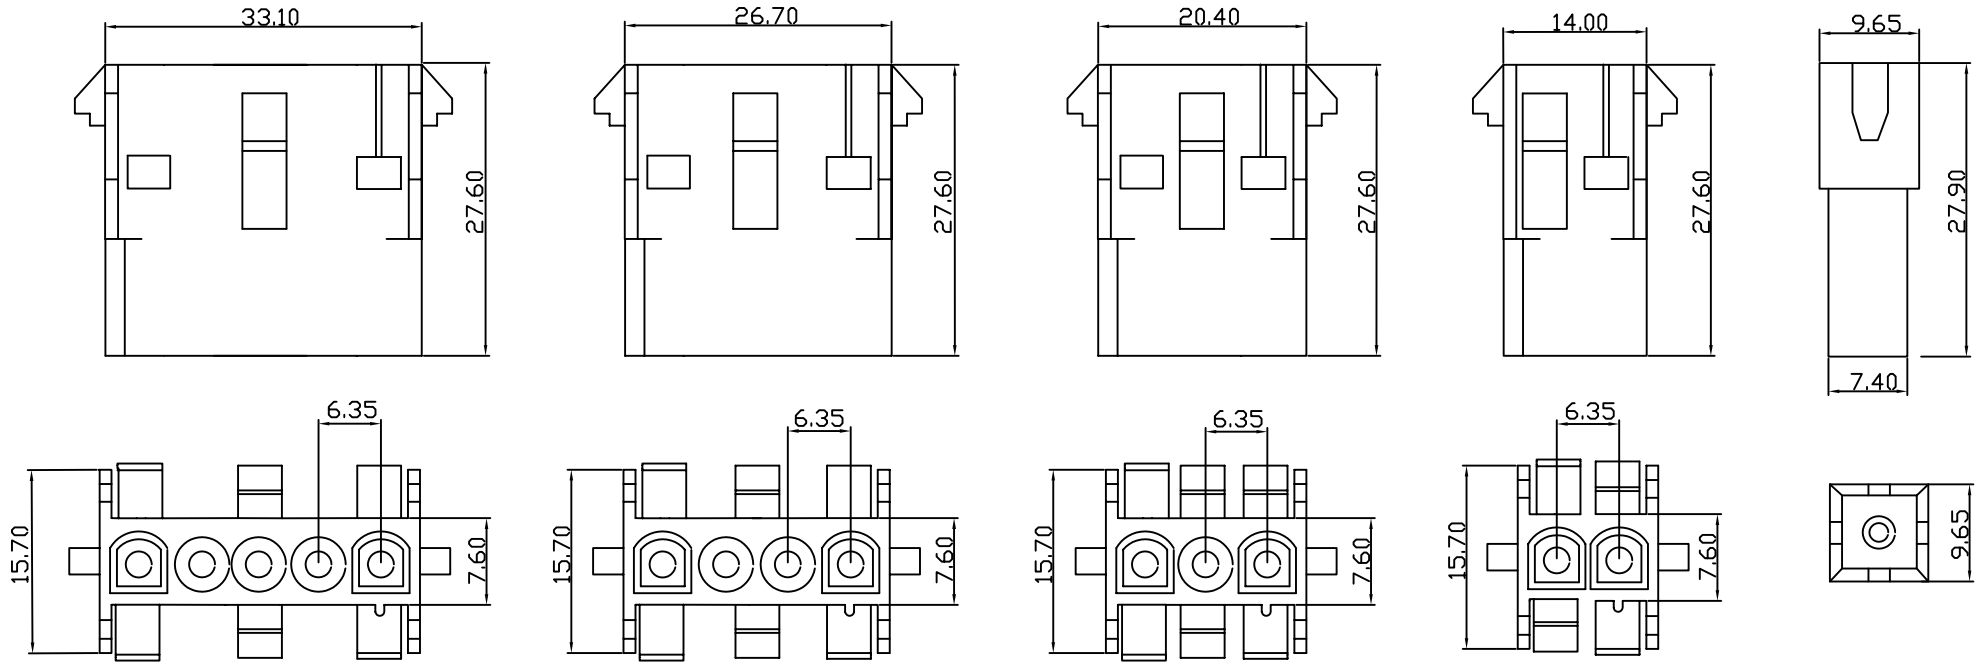

PART NO. **UL-P-1Xxx**

DWG NO. **UL-P-1Xxx**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm SCALE 1:1

PROJECTION