


SIMM Socket, Pitch 1.27mm  
Plastic Post, Type 5  
Physical:

- Housing:** LCP Or NY, UL 94V-0
- Contact:** Copper Alloy
- Specifications:
- Current Rating:** 1A.
- Insulation Resistance:** 1000M ohm min
- Contact Resistance:** 30m ohm max
- Dielectric Withstanding Voltage:**  
AC 500V For 1 Minute
- Temperature Rating:** -55°C To +105°C
- Wave Soldering temperature:**  
Lead Part: 245±5°C, 5sec  
RoHS Part: 260±5°C, 5sec

PINS	A	B	C	D	E
64	39.37	39.37	50.80	50.80	105.23
68	41.90	41.90	53.34	53.34	110.31
72	44.45	44.45	55.78	55.78	115.45
80	49.53	49.53	60.90	60.90	125.75

HSM-D-1Xxx-LF  
LEADFREE  
RoHS Compliant

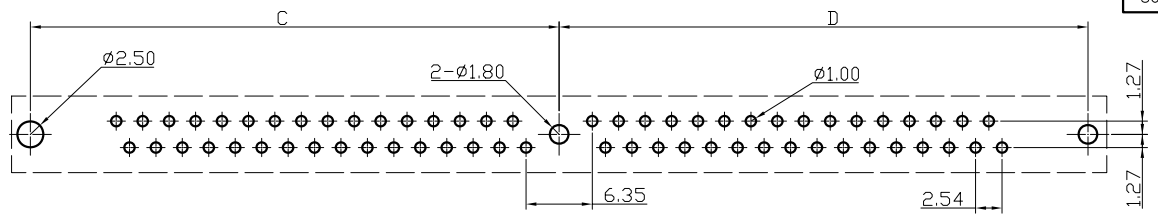

TOP VIEW  
PCB LAYOUT RECOMMENDED



PART NO. HSM-D-1Xxx

DWG NO. HSM-D-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

AREA	REVISIONS	HK	DATE

UNIT / mm    SCALE 1:1

PROJECTION