
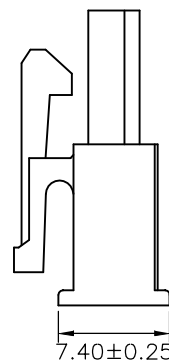


3P

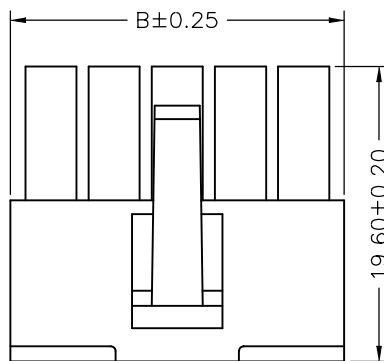

4P,5P

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0 or UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MF-SH-1X03	8.40	13.80
MF-SH-1X04	12.60	18.00
MF-SH-1X05	16.80	22.20

MF-SH-1Xxx-LF
 LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. MF-SH-1Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 4.20mm PITCH HOUSING-RECEPTACLE, SINGLE ROW, MINI-FIT		
DWG NO. MF-SH-1Xxx					DRAWING BY	
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1					