
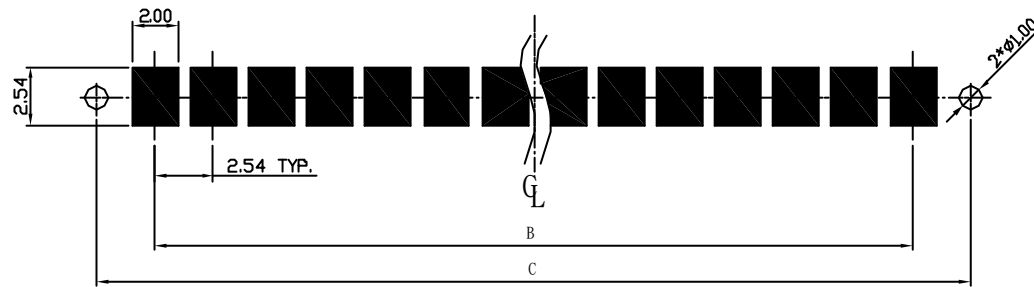
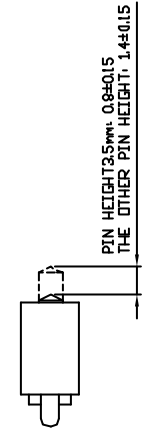



PIN HEIGHT	DIM.	DIM E
3.5mm-5.5mm		2.95
6.0mm-7.5mm		4.00

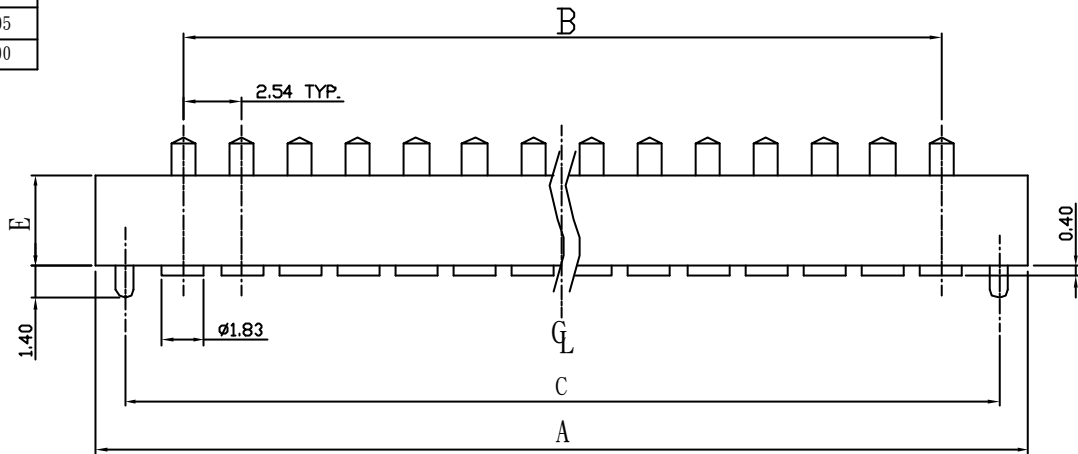

PIN NO.	DIM	DIM A	DIM B	DIM C
02		10.16	2.54	7.62
03		12.70	5.08	10.16
04		15.24	7.62	12.70
05		17.78	10.16	15.24
06		20.32	12.70	17.78
07		22.86	15.24	20.32
08		25.40	17.78	22.86
09		27.94	20.32	25.40
10		30.48	22.86	27.94
11		33.02	25.40	30.48
12		35.56	27.94	33.02
13		38.10	30.48	35.56
14		40.64	33.02	38.10
15		43.18	35.56	40.64
16		45.72	38.10	43.18

NOTES :

- Material :
Housing : Thermoplastic , UL 94V-0
Terminal : Copper Alloy
- Finish :
Terminal : 0.5um Au / 2.5um Ni

RECOMMENDED P. C. B. LAYOUT
LAYOUT TOLERANCE = ± 0.05 mm

PGP26-VxxP-1Xxx-LF
LEADFREE
02-16
DIM L
35:3.5mm
42:4.25mm
45:4.5mm
50:5.0mm
55:5.5mm
60:6.0mm
65:6.5mm
70:7.0mm
75:7.5mm

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. PGP26-VxxP-1Xxx

DWG NO. PGP26-VxxP-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

2.54mm PITCH PIN HEADER
(SPRING PIN SINGLE TYPE)

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

