


MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 15 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANGE: -40 °C ~ +105 °C
 SCREW TORQUE VALUE: 6.0Kgf.cm
 WIRE RANGE: 14 ~ 22 AWG
 1) MOLDED PARTS: THERMOPLASTIC, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3
 4) COVER: TRANSPARENT,PVC

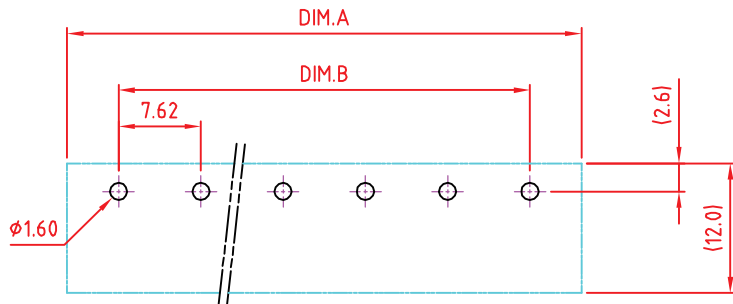

P.C.B LAYOUT

POLES	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	17.16	24.78	32.40	40.02	47.64	55.26	62.88	70.50	78.12	85.74	93.36	100.98	108.60	116.22	123.84	
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30	
TOL	+0.20/-0.20				+0.30/-0.30				+0.40/-0.40							

POLES	17	18	19	20
A	131.46	139.08	146.70	154.32
B	121.92	129.54	137.16	144.78
TOL	+0.50/-0.50			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

TBB076-DSC-xx-LF

SERIES | LEADFREE
 | 02~32WAY
 | CAP
 | SIDE
 | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: