


Specifications:

1.Electrical:

- 1-1 Rating: AC 5V/0.5A
- 1-2 Contact Resistance: 50m Ohm or less
- 1-3 Insulation Resistance: 100M Ohm Min at DC500V
- 1-4 Dielectric Withstanding Voltage: AC 100V for 1 minute(Cut-off: 0.5mA)

2.Mechanical:

- 2-1 Insertion force: 35N (3.57kgf) max.
- 2-2 Withdrawal Force: 1N (0.1kgf) min.

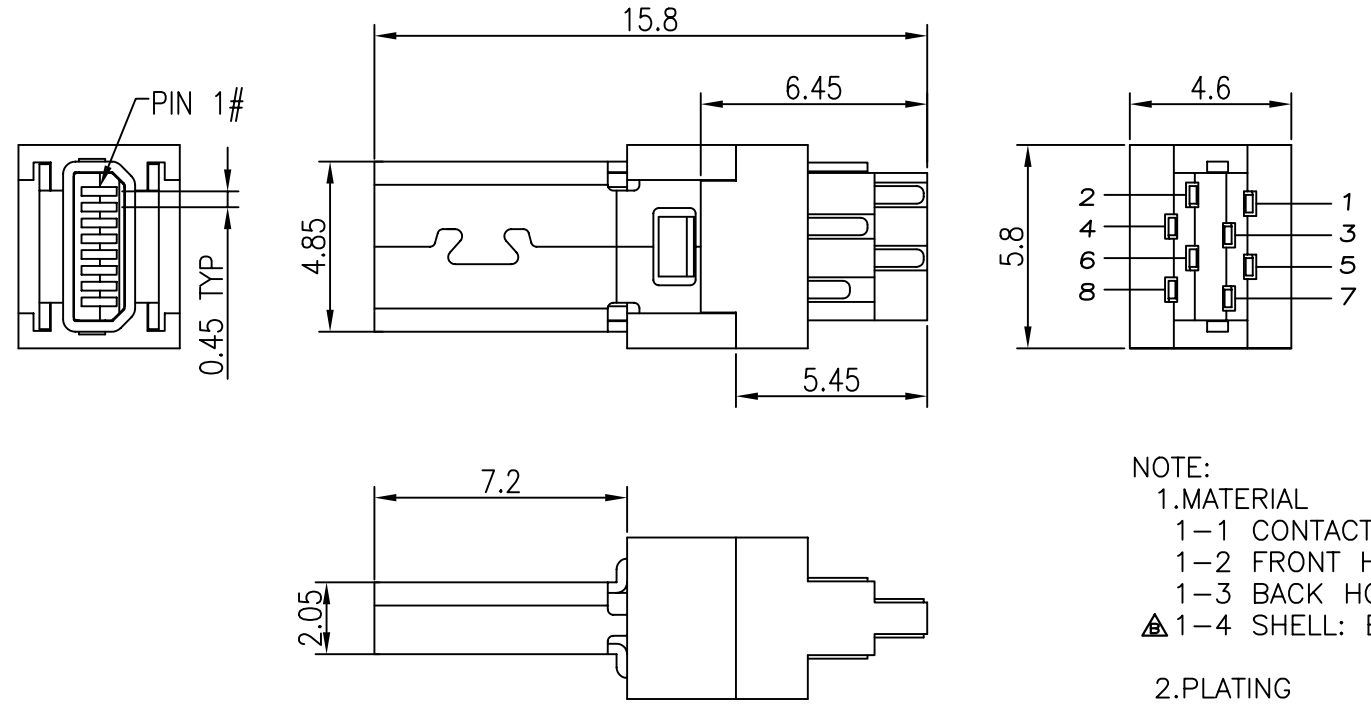

NOTE:

1.MATERIAL

- 1-1 CONTACT: PHOSPHORUS COPPER
- 1-2 FRONT HOUSING: LCP
- 1-3 BACK HOUSING: LCP
- ▲ 1-4 SHELL: BRONZE

2.PLATING

- 2-1 CONTACT: GOLD 10u"/TIN
- 2-2 SHELL: NICKEL



PART NO. MSB-PS-8A

DWG NO. MSB-PS-8A

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.25
.XX ± 0.10
.XXX ±
AWG

DESCRIP TION:

MINI USB B(M) 8P

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE