


### UL-PDP-3X02

### UL-PDP-3X03

### UL-PDP-3X04

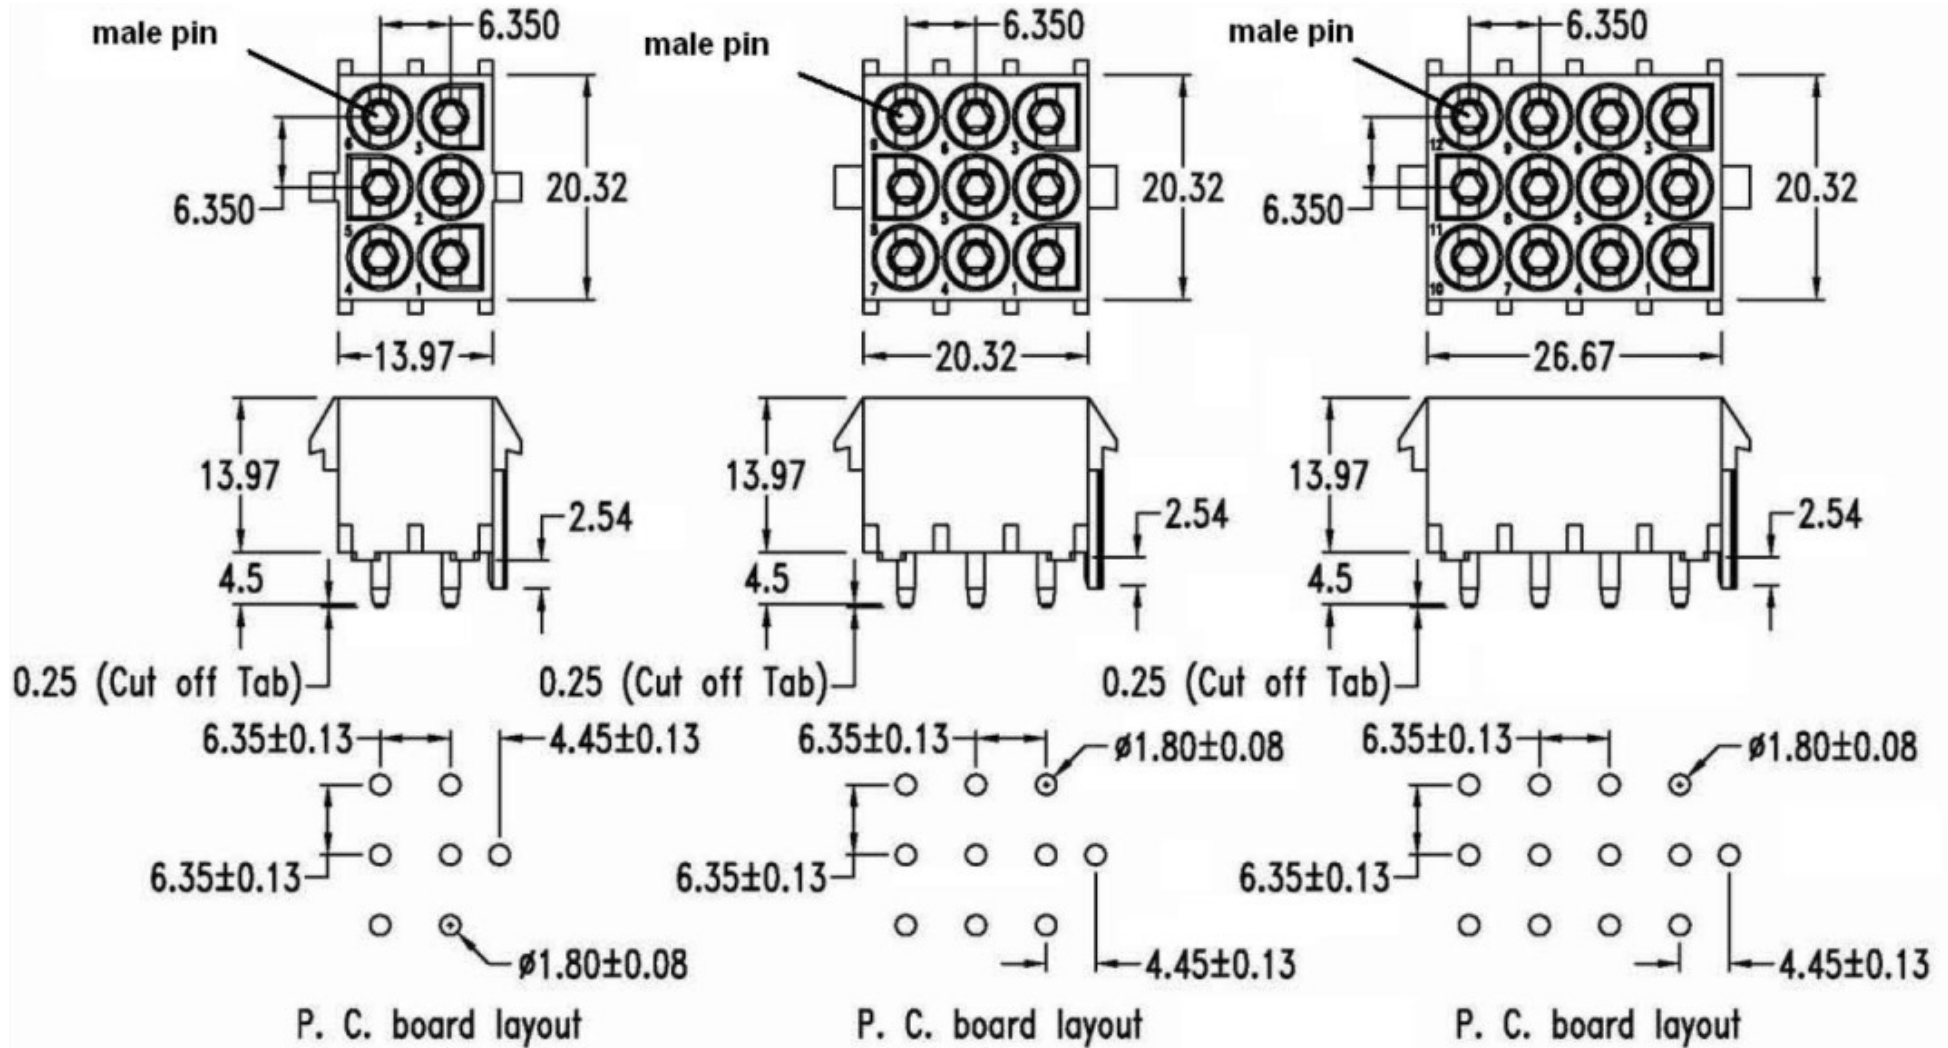

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. UL-PDP-3Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. UL-PDP-3Xxx							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						

煜倫股份有限公司

# UL-PDP-3X05


## Features:

- 2 ~ 10, 12, 15 circuits available
- Pin Material: Tin-plated phosphor bronze
- Standard Color: Nature

## Specification:

- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

UL-PDP-3Xxx-LF  
LEADFREE  
RoHS Compliant

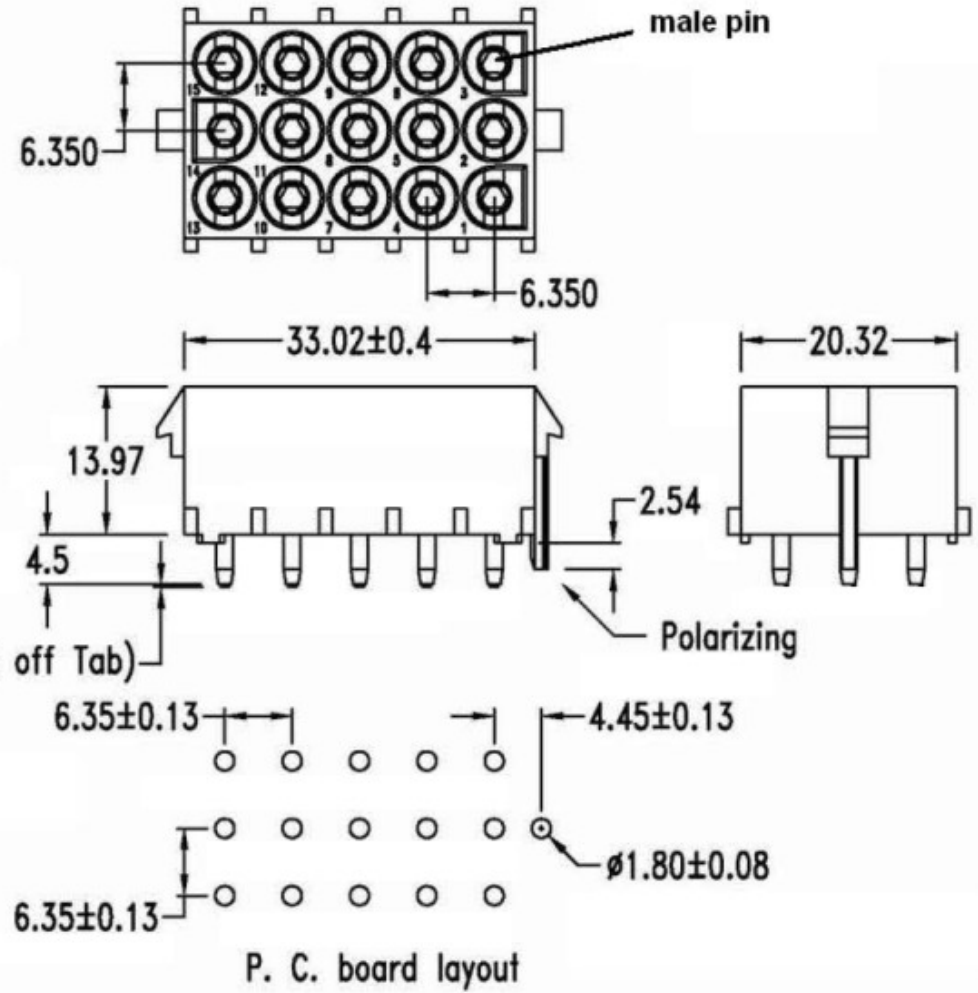

	PART NO. UL-PDP-3Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:	AREA	REVISIONS	HK	DATE
	DWG NO. UL-PDP-3Xxx								
焯倫股份有限公司	FILE NO.		PROJECTION						
	UNIT / mm	SCALE 1:1							