



M8-4PIN FEMALE RIGHT-ANGLE TO OPEN (YELLOW PVC JACKET)

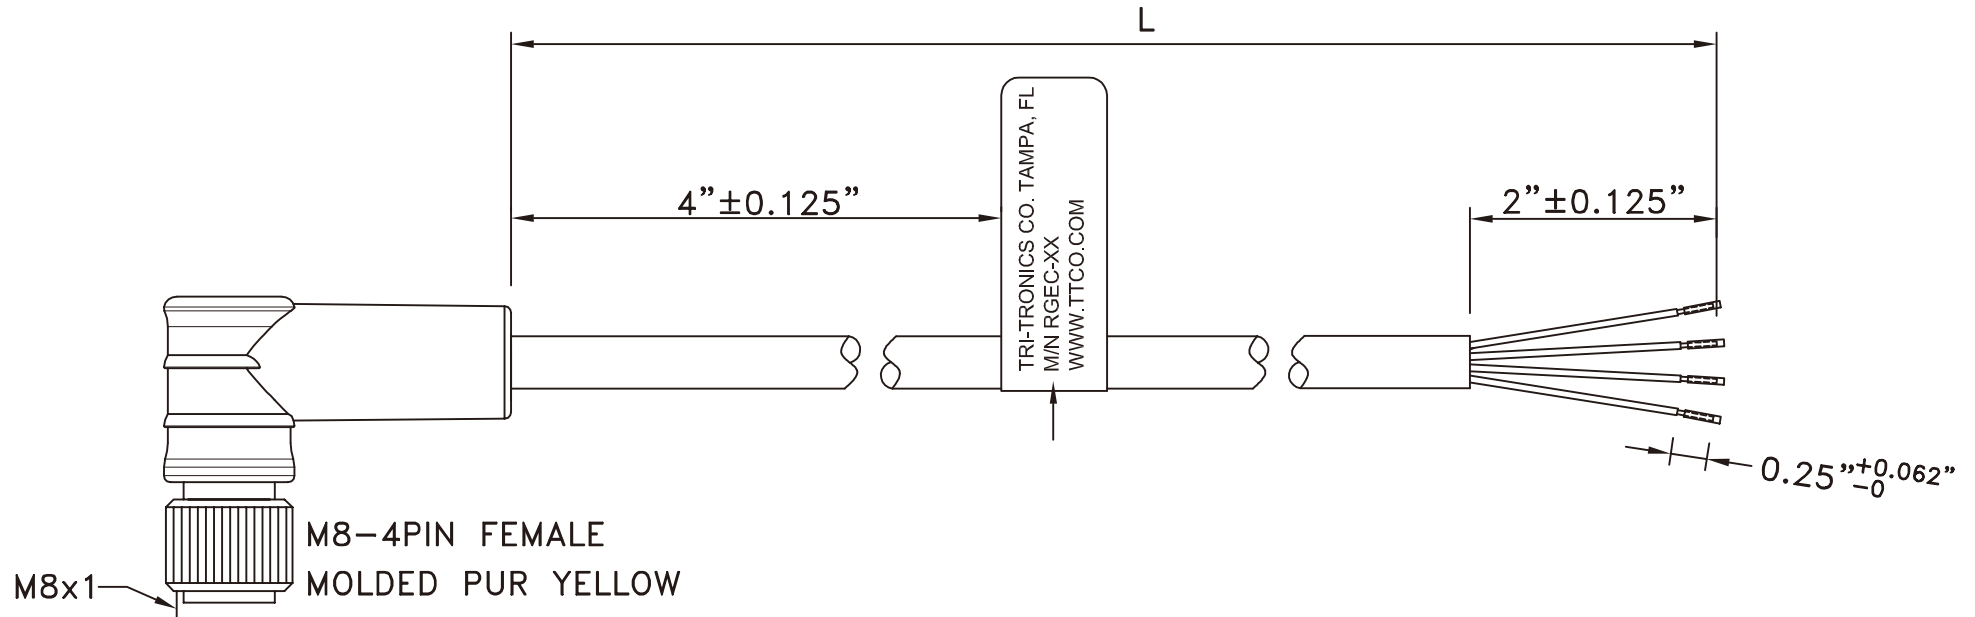

FRONT VIEW

PIN OUT

M8-4PIN FEMALE

1	BROWN	NC	(L=6'±2")
2	WHITE	NC	(L=15'±6")
3	BLUE	NC	(L=25'±1')
4	BLACK	NC	

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

M8X1-04R0024YL-Fxxx-LF			
SERIES	90°	FEMALE	LEADFREE
	4 PIN		
	24 AWG		6F: 6 FEET 15F: 15 FEET 25F: 25 FEET

DESCRIPTION:

M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)

***CONSTRUCTION:

1.CABLE: * UL2464 (4C/24#)+TISSUE PAPER OD:4.4mm YELLOW PVC JACKET.

***CONNECTORS:

- 2.M8-4PIN: * M8-4PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M8x1 BRASS WITH NICKEL PLATED.
 * O-RING: SILICONE RUBBER RED COLOR.
 * MOLDED: PUR YELLOW COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RGEC-XX WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 2A VOLTAGE RATING: 250V
- 6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION 

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

M8X1-04R0024YL-Fxxx-LF

SERIES	90°	FEMALE	LEADFREE
4 PIN	24 AWG	YELLOW	6F: 6 FEET 15F: 15 FEET 25F: 25 FEET

DESCRIPTION: