

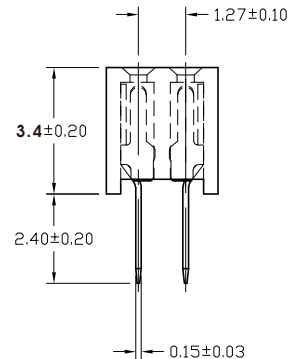


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	1.27	3.00	○
6	2.54	4.27	○
8	3.81	5.54	○
10	5.08	6.81	○
12	6.35	8.08	○
14	7.62	9.35	○
16	8.89	10.62	○
18	10.16	11.89	○
20	11.43	13.16	○
22	12.70	14.43	○
24	13.97	15.70	○
26	15.24	16.97	○
28	16.51	18.24	○
30	17.78	19.51	○
32	19.05	20.78	○
34	20.32	22.05	○
36	21.59	23.32	○
38	22.86	24.59	○
40	24.13	25.86	○
42	25.40	27.13	○
44	26.67	28.40	○
46	27.94	29.67	○
48	29.21	30.94	○
50	30.48	32.21	○
52	31.75	33.48	○
54	33.02	34.75	○
56	34.29	36.02	○
58	35.56	37.29	○
60	36.83	38.56	○
62	38.10	39.83	○
64	39.37	41.10	○
66	40.64	42.37	○
68	41.91	43.64	○
70	43.18	44.91	○
72	44.45	46.18	○
74	45.72	47.45	○
76	46.99	48.72	○
78	48.26	49.99	○
80	49.53	51.26	○
82	50.80	52.53	○
84	52.07	53.80	○
86	53.34	55.07	○
88	54.61	56.34	○
90	55.88	57.61	○
92	57.15	58.88	○
94	58.42	60.15	○
96	59.69	61.42	○
98	60.96	62.69	○
100	62.23	63.96	○

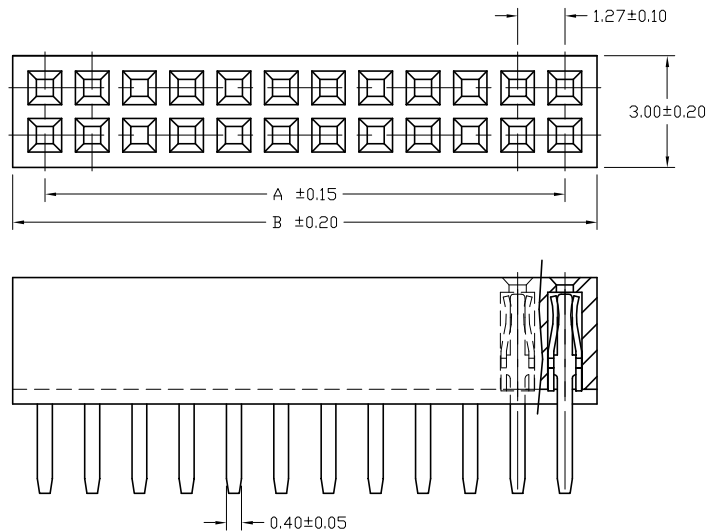

Recommended PCB Layout  
(PCB TOLERANCE ±0.05)



**SPECIFICATIONS**

Current Rating: 1 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°-+105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)

Contact Material: Phosphor bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0  
 Color : Black

Finish: Gold plated  
 ◎ Standard: Gold flash all over



PART NO. **YA-D34-2Xxx**

DWG NO. **YA-D34-2Xxx**

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.25  
.XX ± 0.20  
.XXX ±  
AWG


DESCRIPTION: 1.27X1.27mm SOCKET

煜倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE