


MATERIALS:

- HOUSING—PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL 94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN—0.40mm THICK COPPER ALLOY,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

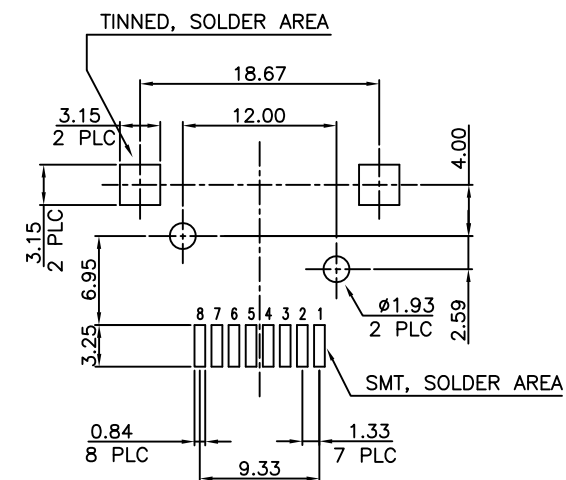

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION


X, ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

MJVS14-KE06P-0808K-LF

SERIES | | | | | | | | | | LEADFREE
KEY
8P8C
BLACK POST
06u" GOLD
EAR

DESCRIPTION: RJ45, TOP ENTRY JACK SMT TYPE