

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F




E

D

C

B

A

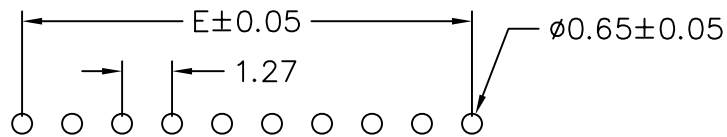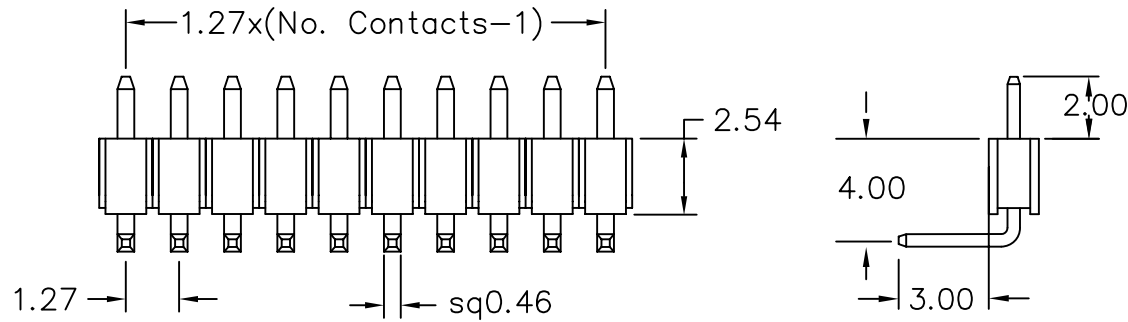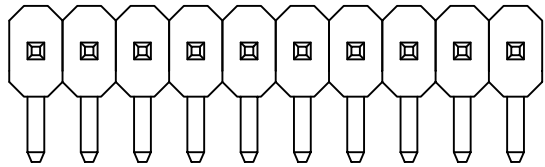

Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T  
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Operation Temperature : -55°C to + 105°C

P-R2030-2Xxx-LF

LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. P-R2030-2Xxx

DWG NO. P-R2030-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE  
.0 = ±.30  
.00 = ±.20  
.000 = ±.XXX  
.0000 = ±.  
ANG. = ±3°

DESCRIPTION:  
AREA

PIN HEADER 1.27\*2.54mm  
RIGHT ANGLE TYPE, DUAL ROWS  
REVISIONS

HK  
DATE

焜倫股份有限公司