


**SPECIFICATIONS**  
 CURRENT RATING: 3 AMPS  
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.  
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING: AC 500V  
 OPERATING TEMPERATURE: -25°C ~ +85°C

**MATERIAL**  
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)  
 INSULATOR: PBT, UL 94V-0

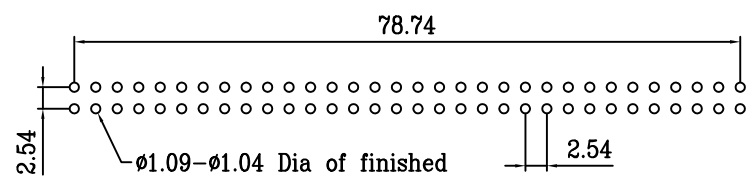

hole after plating  
 Drilled hole Dia.  $\phi 1.17$ - $\pm 1.13$   
 Tin/Lead plated 0.005 Min.  
 Copper plating 0.025-0.075  
 (Follow SPEC. -PC-104)

FE-P23-2Xxx-LF  
 LEADFREE

RoHS Compliant

Recommend P.C.B. Layout  
 TOP View



煜倫股份有限公司

PART NO. FE-P23-2Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. FE-P23-2Xxx							
FILE NO.		DRAWING BY	AREA REVISIONS HK DATE				
UNIT / mm	SCALE 1:1	PROJECTION					