


RECOMMEND P.C.B LAYOUT



MSB-SW-10D-LF  
LEADFREE  
RoHS Compliant

- 備註/NOTE:
- △ 1.安規/SAFETY:
    - 1-1. Temperature rise: 0.3Aac/30Vac.
    - 1-2. Insulation resistance: 500Vac/1min.
    - 1-3. Dielectric withstanding voltage: 250Vac/0.5mA/1min.
    - 1-4. Low level resistance: full scale voltage 20mV/current 10mA.
    - 1-5. Durability: 12000cycles-200mm/min.
  - 2.材質/MATERIAL:
    - 2-1 膠芯/HOUSING: LCP.
    - 2-2 端子/PIN: 磷銅/PHOSPHOR BRONZE.
    - 2-3 鐵殼/SHELL: 磷銅/PHOSPHOR BRONZE.
  - 3.電鍍/PLATING:
    - 3-1 端子/PIN: TABLE A
    - 3-2 鐵殼/SHELL: 霧錫/TIN.

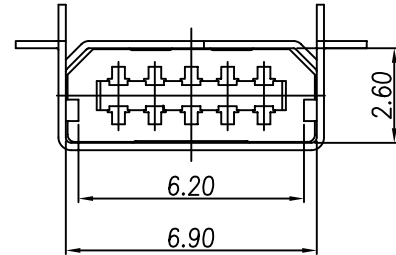

PART NO. MSB-SW-10D		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIPTION: MINI USB 10PIN (F)	AREA	REVISIONS	HK	DATE
DWG NO. MSB-SW-10D		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

煜倫股份有限公司