

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, (UL94V-0)
 Nylon 6T
 All materials must be GP materials

S-V28X-2Xxx-LF
 LEADFREE

RoHS Compliant

RECOMMENDED P.C.B LAYOUT

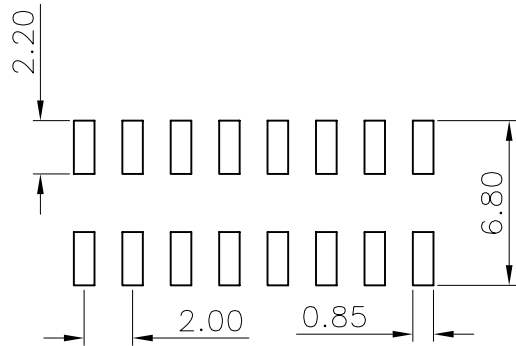

PART NO. S-V28X-2Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE W/POST
DWG NO. S-V28X-2Xxx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司