
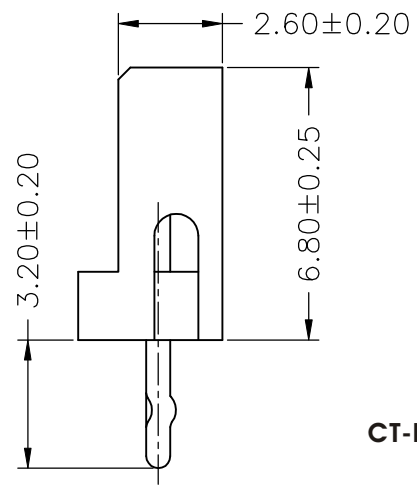


**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 800V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-0

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
CT-D-02	2.00	5.96
CT-D-03	4.00	7.96
CT-D-04	6.00	9.96
CT-D-05	8.00	11.96
CT-D-06	10.00	13.96
CT-D-07	12.00	15.96
CT-D-08	14.00	17.96
CT-D-09	16.00	19.96
CT-D-10	18.00	21.96
CT-D-11	20.00	23.96
CT-D-12	22.00	25.96
CT-D-13	24.00	27.96
CT-D-14	26.00	29.96
CT-D-15	28.00	31.96

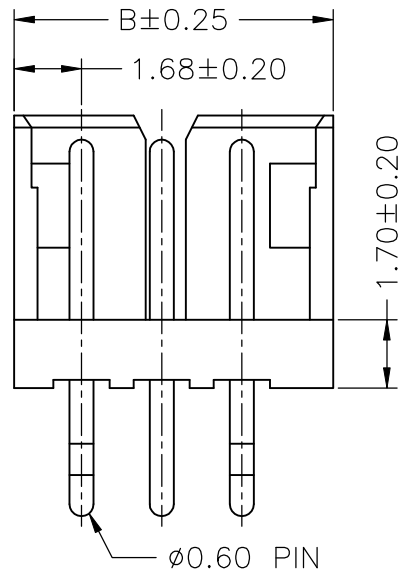

**RoHS Compliant**



PART NO. <b>CT-D-xx</b>	
DWG NO. <b>CT-D-xx</b>	
FILE NO.	CHECKED BY CY
UNIT / mm	DRAWING BY
SCALE 1:1	PROJECTION

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:	<b>2.00mm PITCH 180° WAFER</b>			
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司